

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 November 2001 (01.11.2001)

PCT

(10) International Publication Number
WO 01/82467 A2

- (51) International Patent Classification⁷: **H03B**
- (21) International Application Number: PCT/US01/40563
- (22) International Filing Date: 20 April 2001 (20.04.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/199,063 20 April 2000 (20.04.2000) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 60/199,063 (CIP)
filed on 20 April 2000 (20.04.2000)
- (71) Applicant (for all designated States except US): **THE REGENTS OF THE UNIVERSITY OF MICHIGAN** [US/US]; 3003 S. State Street, Ann Arbor, MI 48109 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **NGUYEN, Clark, T., C.** [US/US]; Apartment No. 302, 3000 Whisperwood Drive, Ann Arbor, MI 48105 (US).
- (74) Agents: **SYROWIK, David, R.** et al.; Brooks & Kushman, 1000 Town Center, 22nd floor, Southfield, MI 48075 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD AND APPARATUS FOR GENERATING A SIGNAL HAVING AT LEAST ONE DESIRED OUTPUT FREQUENCY UTILIZING A BANK OF VIBRATING MICROMECHANICAL DEVICES

(57) Abstract: Several MEMS-based methods and architectures which utilize vibrating micromechanical resonators in circuits to implement filtering, mixing, frequency reference and amplifying functions are provided. A method and apparatus are shown for generating a signal having at least one desired output frequency such as LO frequency in an RF subsystem in response to a tuning voltage and without the need for a phase-locking circuit. One of the primary benefits of the use of such architectures is a savings in power consumption by trading power for high selectivity (i.e., high Q). Consequently, the present invention relies on the use of a large number of micromechanical links in SSI networks to implement signal processing functions with basically zero DC power consumption.

WO 01/82467 A2

METHOD AND APPARATUS FOR GENERATING A SIGNAL
HAVING AT LEAST ONE DESIRED OUTPUT FREQUENCY UTILIZING
A BANK OF VIBRATING MICROMECHANICAL DEVICES

5 STATEMENT REGARDING FEDERALLY SPONSORED
RESEARCH OR DEVELOPMENT

This invention was made with government support under Contract No. F30602-97-2-0101 awarded by DARPA. The government has certain rights in the invention.

10 BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to methods and apparatus for generating a signal having at least one desired output frequency utilizing a bank of vibrating micromechanical devices.

15 2. Background Art

The need for passive off-chip components has long been a key barrier against communication transceiver miniaturization. In particular, the majority of the high- Q bandpass filters commonly used in the RF and IF stages of heterodyning transceivers are realized using off-chip, mechanically-resonant components, such as
20 crystal and ceramic filters and SAW devices, as illustrated in Figure 1. Due to higher quality factor Q , such technologies greatly outperform comparable filters implemented using transistor technologies, in insertion loss, percent bandwidth, and achievable rejection. High Q is further required to implement local oscillators or synchronizing clocks in transceivers, both of which must satisfy strict phase noise
25 specifications. Again, as illustrated in Figure 1, off-chip elements (*e.g.*, quartz crystals) are utilized for this purpose.

Being off-chip components, the above mechanical devices must interface with integrated electronics at the board level, and this constitutes an important bottleneck against the miniaturization of super-heterodyne transceivers. For this reason, recent attempts to achieve single-chip transceivers for paging and cellular communications have utilized alternative architectures that attempt to eliminate the need for off-chip high- Q components via higher levels of transistor integration. Unfortunately, without adequate front-end selectivity, such approaches have suffered somewhat in overall performance, to the point where they so far are usable only in less demanding applications.

Given this, and recognizing that future communication needs will most likely require higher levels of performance, single-chip transceiver solutions that retain high- Q components and that preserve super-heterodyne-like architectures are desirable.

Recent demonstrations of vibrating beam micromechanical (“ μ mechanical”) resonator devices with frequencies in the VHF range and Q ’s in the tens of thousands have sparked a resurgence of research interest in communication architectures using high- Q passive devices as disclosed in the above-noted patent application entitled “Device Including A Micromechanical Resonator Having An Operating Frequency and Method of Extending Same.” Much of the interest in these devices derives from their use of IC-compatible microelectromechanical systems (MEMS) fabrication technologies to greatly facilitate the on-chip integration of ultra-high- Q passive tanks together with active transistor electronics, allowing substantial size reduction.

Figure 2 illustrates a comparison of MEMS and SAW technologies wherein MEMS offers the same or better high- Q frequency selectivity with orders of magnitude smaller size. Indeed, reductions in size and board-level packaging complexity, as well as the desire for the high performance attainable by super-heterodyne architectures, are principal drivers for this technology.

Although size reduction is certainly an advantage of this technology (commonly dubbed "RF MEMS"), it merely touches upon a much greater potential to influence general methods for signal processing. In particular, since they can now be integrated (perhaps on a massive scale) using MEMS technology, vibrating μ mechanical resonators (or μ mechanical links) can now be thought of as tiny circuit elements, much like resistors or transistors, in a new mechanical circuit technology. Like a single transistor, a single mechanical link does not possess adequate processing power for most applications. However, again like transistors, when combined into larger (potentially, VLSI) circuits, the true power of μ mechanical links can be unleashed, and signal processing functions with attributes previously inaccessible to transistor circuits may become feasible.

The Need for High Q in Oscillators

For any communications application, the stability of the oscillator signals used for frequency translation, synchronization, or sampling, is of utmost importance. Oscillator frequencies must be stable against variations in temperature against aging, and against any phenomena, such as noise or microphonics, that cause instantaneous fluctuations in phase and frequency. The single most important parameter that dictates oscillator stability is the Q of the frequency-setting tank (or of the effective tank for the case of ring oscillators). For a given application, and assuming a finite power budget, adequate long- and short-term stability of the oscillation frequency is insured only when the tank Q exceeds a certain threshold value.

Given the need for low power in portable units, and given that the synthesizer (containing the reference and VCO oscillators) is often a dominant contributor to total transceiver power consumption, modern transceivers could benefit greatly from technologies that yield high- Q tank components.

The Need for High Q in Filters

Tank Q also greatly influences the ability to implement extremely selective IF and RF filters with small percent bandwidth, small shape factor, and low insertion loss. As tank Q decreases, insertion loss increases very quickly, too much even for IF filters, and quite unacceptable for RF filters. As with oscillators, high- Q tanks are required for RF and IF filters alike, although more so for the latter, since channel selection is done predominantly at the IF in super-heterodyne receivers. In general, the more selective the filter, the higher the resonator Q required to achieve a given level of insertion loss.

10 Micromechanical Circuits

Although mechanical circuits, such as quartz crystal resonators and SAW filters, provide essential functions in the majority of transceiver designs, their numbers are generally suppressed due to their large size and finite cost. Unfortunately, when minimizing the use of high- Q components, designers often trade power for selectivity (*i.e.*, Q), and hence, sacrifice transceiver performance. As a simple illustration, if the high- Q IF filter in the receive path of a communication subsystem is removed, the dynamic range requirement on the subsequent IF amplifier, IQ mixer, and A/D converter circuits, increases dramatically, forcing a corresponding increase in power consumption. Similar trade-offs exist at RF, where the larger the number or greater the complexity of high- Q components used, the smaller the power consumption in surrounding transistor circuits.

The Micromechanical Beam Element

To date, the majority of μ mechanical circuits most useful for communication applications in the VHF range have been realized using μ mechanical flexural-mode beam elements, such as shown in Figure 2 with clamped-clamped boundary conditions. Although several micromachining technologies are available to realize such an element in a variety of different materials, surface

micromachining has been the preferred method for μ mechanical communication circuits, mainly due to its flexibility in providing a variety of beam end conditions and electrode locations, and its ability to realize very complex geometries with multiple levels of suspension.

5 U.S. Patent No. 6,049,702 to Tham et al. discloses an integrated passive transceiver section wherein microelectromechanical (MEM) device fabrication techniques are used to provide low loss, high performance switches. Utilizing the MEM devices also makes possible the fabrication and use of several circuits comprising passive components, thereby enhancing the performance
10 characteristics of the transceiver.

U.S. Patent No. 5,872,489 to Chang et al. discloses an integrated tunable inductance network and method. The network utilizes a plurality of MEM switches which selectively interconnect inductance devices thereby providing a selective inductance for a particular circuit.

15 U.S. Patent No. 5,963,857 to Greywall discloses an article comprising a micromachined filter. In use, the micromachined filters are assembled as part of a radio to miniaturize the size of the radio.

U.S. Patent Nos. 5,976,994 and 6,169,321 to Nguyen et al. disclose a batch-compatible, post-fabrication annealing method and system to trim the
20 resonance frequency and enhance the quality factor of micromechanical structures.

U.S. Patent Nos. 5,455,547; 5,589,082 and 5,537,083 to Lin et al. disclose microelectromechanical signal processors. The signal processors include many individual microelectromechanical resonators which enable the processor to function as a multi-channel signal processor or a spectrum analyzer.

25 U.S. Patent No. 5,640,133 to MacDonald et al. discloses a capacitance-based, tunable, micromechanical resonator. The resonators may be

selectively tuned and used in mechanical oscillators, accelerometers, electromechanical filters and other electronic devices.

U.S. Patent Nos. 5,578,976 to Yao, 5,619,061 to Goldsmith et al. and 6,016,092 to Qiu et al. disclose various micromechanical and
5 microelectromechanical switches used in communication apparatus.

U.S. Patent No. 5,839,062 to Nguyen et al. disclose a MEMS-based receiver including parallel banks of microelectromechanical filters.

U.S. Patent Nos. 5,491,604 and 5,955,932 to Nguyen et al. disclose *Q*-controlled microresonators and tunable filters using the resonators.

10 U.S. Patent No. 5,783,973 to Weinberg et al. discloses a micromechanical, thermally insensitive silicon resonator and oscillator.

The following articles are of general interest: Nguyen et al., "Design and Performance of CMOS Micromechanical Resonator Oscillators", 1994 IEEE INTERNATIONAL FREQUENCY CONTROL SYMPOSIUM, pp. 127-134; Wang et al., "*Q*-
15 Enhancement of Microelectromechanical Filters Via Low-Velocity Spring Coupling", 1997 IEEE ULTRASONICS SYMPOSIUM, pp. 323-327; Bannon, III et al., "High Frequency Microelectromechanical IF Filters", 1996 IEEE ELECTRON DEVICES MEETING, San Francisco, CA, Dec.8-11, 1996, pp. 773-776; and Clark et al., "Parallel-Resonator HF Micromechanical Bandpass Filters" 1997
20 INTERNATIONAL CONFERENCE ON SOLID-STATE SENSORS AND ACTUATORS", pp. 1161-1164.

Due to strict requirements on both long- and short-term stability, the local oscillator (LO) synthesizer is among the most difficult functional blocks to implement in a transceiver, and among the largest power consumers in the total
25 subsystem. In most renditions of local oscillator synthesizers, two oscillators are utilized: a high-frequency (0.4-4 GHz) voltage-controlled oscillator (VCO) referenced to a medium *Q* (*Q*~40) off-chip LC tank; and a lower frequency

(~10 MHz) reference oscillator using a quartz crystal with a loaded $Q \sim 10,000$. In the synthesizer, the VCO generates the LO output, and is able to achieve good far-from-carrier phase noise, but must be locked via a phase-locked loop to the reference oscillator to attain adequate thermal stability and sufficiently low close-to-carrier phase noise. The power consumption in such synthesizers is often dominated by the requirement for low phase noise (~30 mW needed in the VCO for short-range applications), and by the need for phase-locking and frequency division when locking the two oscillators (~70 mW needed). If oven-control is required for stability against thermal variations, an additional 1-10 W may be required, not to mention a much larger size.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a method and apparatus for generating a signal having at least one desired output frequency in a system in response to a tuning voltage and without the need for a phase-locking circuit by utilizing a bank of vibrating micromechanical devices.

In carrying out the above object and other objects of the present invention, a method is provided for generating a signal having at least one desired output frequency in a system without the need for a phase-locking circuit. The method includes providing a bank of micromechanical devices and vibrating one or more of the devices so that each vibrating device generates a signal having an output frequency. The method also includes controllably selecting one or more of the vibrating devices to generate a signal having the at least one desired output frequency in response to the tuning voltage.

Each of the devices may have a Q in excess of 100 and, preferably, more than 5000.

The number of devices may be more than 10, and may even be more than 1000.

The desired output frequency may be more than 300 MHz.

Each of the devices may have an adjustable Q. The method may further include lowering the Q of the at least one vibrating device having the at least one desired output frequency initially during the step of vibrating and then raising the Q during the step of vibrating. The step of lowering may include controllably coupling at least one circuit element to the at least one vibrating device having the at least one desired frequency and the step of raising may include the step of controllably decoupling the at least one circuit element from the at least one vibrating device having the at least one desired frequency.

10 In further carrying out the above object and other objects of the present invention, a local oscillator synthesizer apparatus for generating a signal having at least one desired output frequency is provided for use in a system in response to a tuning voltage and without the need for a phase-locking circuit. The apparatus includes a parallel bank of micromechanical resonators. Each of the resonators corresponds to a frequency. A controller is provided for selecting at least one desired resonator of the bank of resonators to thereby provide frequency selection.

20 The apparatus further includes an oscillator sustaining circuit wherein each of the resonators is switchable into or out of the oscillator sustaining circuit by the controller.

The controller may include a decoder for controlling application of an appropriate bias voltage and to the at least one desired resonator.

25 The resonators may be interlinked and wherein each of the resonators may have an input connected to a common input and also may have an output connected to a common output.

The frequency of each of the resonator devices is not only switchable but also tunable (i.e., via dc-biasing) to obtain a bank of switchable, tunable resonator devices.

Each of the resonators has a predetermined Q and the controller may
5 selectively switch at least one circuit element to the at least one desired resonator to lower the Q of the at least one desired resonator from its predetermined Q and selectively switches the at least one circuit element from the at least one desired resonator to raise the Q of the at least one desired resonator to its predetermined Q.

The above object and other objects, features, and advantages of the
10 present invention are readily apparent from the following detailed description of the best mode for carrying out the invention when taken in connection with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a prior art, schematic view of the front-end of a
15 transceiver including off-chip, board-level implementation of SAW, ceramic and crystal resonators in a schematic perspective view;

FIGURE 2a is a prior art, schematic perspective view of a SAW resonator and a number of MEMS resonators formed on a silicon die to compare the two approaches;

20 FIGURE 2b is a prior art, enlarged schematic perspective view of one of the MEMS resonators as indicated at 2b in Figure 2a;

FIGURE 3 is a system level schematic block diagram of the front-end design for a typical wireless transceiver showing off-chip, high-Q, passive components targeted for replacement via micromechanical versions of the present
25 invention;

FIGURE 4 is a graph of transmission [dB] versus frequency illustrating desired filter characteristics;

FIGURE 5a is a perspective schematic view of a symmetrical two-resonator VHF μ mechanical filter with typical bias, excitation and signal conditioning electronics;

FIGURE 5b is an electrical equivalent circuit for the filter of Figure 5a;

FIGURE 6 is a system level block diagram of an RF front-end receiver including an RF channel-select receiver architecture utilizing large numbers of micromechanical resonators in banks and schematically and perspective-ly illustrating a typical micromechanical filter of Figure 5a;

FIGURE 7 is a system/circuit diagram for an RF channel-select micromechanical filter bank;

FIGURE 8 is a system level block diagram of the RF front-end receiver of Figure 6 and schematically and perspective-ly illustrating a micromechanical switch thereof;

FIGURE 9 is a system level block diagram of the RF front-end receiver of Figures 6 and 8 and schematically and perspective-ly illustrating a mixer-filter-gain stage thereof based on the filter of Figures 6 and 5a;

FIGURE 10 is a system level block diagram of the RF front-end receiver of Figures 6, 8 and 9 and schematically and perspective-ly illustrating a micromechanical resonator oscillator thereof;

FIGURE 11 is a system/circuit diagram for a switchable μ mechanical resonator synthesizer;

FIGURE 12 is a system level block diagram of the RF front-end receiver of Figures 6, 8, 9 and 10 wherein the LNA is shown eliminated by phantom lines due to the low loss channel selector, the T/R switch and the mixer-filter-gain stage;

5 FIGURE 13 is a system block diagram architecture showing the receive path of a communication device;

FIGURE 14 is a system block diagram of an RF channel-select transmitter architecture utilizing high-power μ mechanical resonators;

10 FIGURE 15 is a schematic top perspective view of a 92 MHz (VHF) free-free beam polysilicon μ mechanical resonator wherein support beams isolate the resonator beam element from a substrate thereby allowing higher Q operation;

FIGURE 16 is a graph illustrating a measured frequency characteristic for the resonator of Figure 15;

15 FIGURE 17a is a schematic perspective view of a UHF μ mechanical filter utilizing free-free beam μ mechanical resonators designed to operate at a second mode; and

FIGURE 17b is a partial equivalent circuit for the filter of Figure 17a, identifying the circuit functions of individual beam elements.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

20 To illustrate more concretely the specific transceiver functions that can benefit from micromechanical implementations to be discussed herein, Figure 3 presents a system level schematic block diagram for a typical super-heterodyne wireless transceiver. A small box is positioned in the corner of each box to represent a component that can be replaced with a micromechanical (MEMS)
25 version. As implied in Figure 3, several of the constituent components can already

be miniaturized using integrated circuit transistor technologies. These include the low noise amplifiers (LNA's) in the receive path, the solid-state power amplifier (SSPA) in the transmit path, synthesizer phase-locked loop (PLL) electronics, mixers, and lower frequency digital circuits for baseband signal demodulation. Due to noise, power, and frequency considerations, the SSPA (and sometimes the LNA's) are often implemented using compound semiconductor technologies (*i.e.*, GaAs). Thus, they often occupy their own chips, separate from the other mentioned transistor-based components, which are normally realized using silicon-based bipolar and CMOS technologies. However, given the rate of improvement of silicon technologies (silicon-germanium included), all of the above functions may be integrated onto a single-chip.

Unfortunately, placing all of the above functions onto a single chip does very little toward decreasing the overall super-heterodyne transceiver size, which is dominated not by transistor-based components, but by the numerous passive components indicated in Figures 1 and 3. The presence of so many frequency-selective passive components is easily justified when considering that communication systems designed to service large numbers of users require numerous communication channels, which in many implementations (*e.g.*, Time Division Multiple Access (TDMA)) must have small bandwidths and must be separable by transceiver devices used by the system. The requirement for small channel bandwidths results in a requirement for extremely selective filtering devices for channel selection and extremely stable (noise-free) local oscillators for frequency translation. For the vast majority of cellular and cordless standards, the required selectivity and stability can only be achieved using high- Q components, such as discrete inductors, discrete tunable capacitors (*i.e.*, varactors), and SAW and quartz crystal resonators, all of which interface with IC components at the board level. The needed performance cannot be achieved using conventional IC technologies, because such technologies lack the required Q . It is for this reason that virtually all commercially available cellular or cordless phones contain numerous passive SAW and crystal components.

Micromechanical Resonators

For communications applications, clamped-clamped and free-free flexural-mode beams with Q 's on the order of 10,000 (in vacuum) and temperature coefficients on the order of -12 ppm/°C, are available for the VHF range, while
5 thin-film bulk acoustic resonators ($Q \sim 1,000$) have so far addressed the UHF range.

From a design perspective, one Q -limiting loss mechanism that becomes more important with increasing frequency is loss to the substrate through anchors. The frequency dependence of this mechanism arises because the stiffness
10 of a given resonator beam generally increases with resonance frequency, giving rise to larger forces exerted by the beam on its anchors during vibration. As a consequence, more energy per cycle is radiated into the substrate via the anchors. Anti-symmetric resonance designs, such as balanced tuning forks, could prove effective in alleviating this source of energy loss.

15 Anchor loss mechanisms can be greatly alleviated by using "anchor-less" resonator designs, such as shown in the above-noted patent application Serial No. 09/482,670 and as illustrated by the view of Figure 15. This device utilizes a free-free beam (*i.e.*, xylophone) 60 suspended above a ground plane and sense electrode 61 and a drive electrode 63 by four torsional support beams 62 attached
20 at flexural node points. The beams 62, in turn, are supported at anchors 64. By choosing support dimensions corresponding to a quarter-wavelength of the free-free beam's resonance frequency, the impedance presented to the beam 60 by the supports 62 can be effectively nulled out, leaving the beam 60 virtually levitated and free to vibrate as if it had no supports. UHF frequency is obtained via use of free-
25 free beam resonators specifically designed to operate at higher modes. The desired mode is selected (while suppressing other modes), by strategic placement and excitation of electrodes, and by the use of dimples under the structure 60 to force node locations corresponding to the desired mode. The mode can also be specified by placing the support beams at nodal locations, as in Figure 17a.

Figure 16 shows a frequency characteristic for a 92.25 MHz version of this μ mechanical resonator with a Q of nearly 8,000 — still plenty for channel-select RF applications.

Table 1 presents expected resonance frequencies for various beam dimensions, modes, and structural materials, showing a wide range of attainable frequencies, from VHF to UHF.

TABLE 1. μ Mechanical Resonator Frequency Design*

| Frequency (MHz) | Material | Mode | h , [μ m] | W , [μ m] | L , [μ m] |
|--------------------|----------|------|------------------|------------------|------------------|
| 70 | silicon | 1 | 2 | 8 | 14.54 |
| 110 | silicon | 1 | 2 | 8 | 11.26 |
| 250 | silicon | 1 | 2 | 4 | 6.74 |
| 870 | silicon | 2 | 2 | 4 | 4.38 |
| 1800 | silicon | 3 | 1 | 4 | 3.09 |
| 1800 | diamond | 3 | 1 | 4 | 6.16 |

* Determined for free-free beams using Timoshenko methods that include the effects of finite h and W .

Micromechanical Filters

Among the more useful μ mechanical circuits for communications are those implementing low-loss bandpass filters, capable of achieving frequency characteristics as shown in Figure 4 where a broader frequency passband than achievable by a single resonator beam is shown, with a sharper roll-off to the stopband (*i.e.*, smaller shape factor).

To achieve the characteristic of Figure 4, a number of micromechanical resonators may be coupled together by soft coupling springs. By linking resonators together using (ideally) massless springs, a coupled resonator

system is achieved that exhibits several modes of vibration. The frequency of each vibration mode corresponds to a distinct peak in the force-to-displacement frequency characteristic, and to a distinct, physical mode shape of the coupled mechanical resonator system. For the example case of a three-resonator filter, in the lowest frequency mode, all resonators vibrate in phase; in the middle frequency mode, the center resonator ideally remains motionless, while the end resonators vibrate 180° out of phase; and finally, in the highest frequency mode, each resonator is phase-shifted 180° from its adjacent neighbor. Without additional electronics, the complete mechanical filter exhibits a jagged passband. As described hereinbelow, termination resistors designed to lower the Q 's of the input and output resonators by specific amounts are required to flatten the passband and achieve a more recognizable filter characteristic, such as in Figure 4.

The filters use a number of high- Q micromechanical beam elements connected in a network that achieves the specified bandpass frequency response. If effect, a micromechanical filter is another example of a micromechanical circuit, similar to that of Figure 15, but in this case using a plurality of beam elements to achieve a frequency shaping response not achievable by a single beam element.

In practical implementations, because planar IC processes typically exhibit substantially better matching tolerances than absolute, the constituent resonators in μ mechanical filters are normally designed to be identical, with identical dimensions and resonance frequencies. For such designs, the center frequency of the overall filter is equal to the resonance frequency f_o of the resonators, while the filter passband (*i.e.*, the bandwidth) is determined by the spacings between the mode peaks.

The relative placement of the vibration peaks in the frequency characteristic — and thus, the passband of the eventual filter — is determined primarily by the stiffnesses of the coupling springs (k_{sij}) and of the constituent resonators at the coupling locations (k_r). Specifically, for a filter with center frequency f_o and bandwidth B , these stiffnesses must satisfy the expression:

$$B = \left(\frac{f_o}{k_{ij}} \right) \left(\frac{k_{sij}}{k_r} \right) \quad (1)$$

where k_{ij} is a normalized coupling coefficient found in filter cookbooks. The filter bandwidth is not dependent on the absolute values of resonator and coupling beam stiffness; rather, their ratio k_{sij}/k_r dictates bandwidth. Thus, the procedure for designing a mechanical filter involves two main steps (not necessarily in this order): first, design of a mechanical resonator with resonance frequency f_o and adjustable stiffness k_r ; and second, design of coupling springs with appropriate values of stiffness k_{sij} to enable a desired bandwidth within the adjustment range of resonator k_r 's.

To take advantage of the maturity of LC ladder filter synthesis techniques, the enormous database governing LC ladder filter implementations, and the wide availability of electrical circuit simulators, realization of a particular μ mechanical filter often also involves the design of an LC ladder version to fit the desired specification. The elements in the LC ladder design are then matched to lumped mechanical equivalents via electromechanical analogy, where inductance, capacitance, and resistance in the electrical domain equate to mass, compliance, and damping, respectively, in the mechanical domain.

A Two-Resonator HF-VHF Micromechanical Filter

Figure 5a shows a perspective view schematic of a practical two-resonator micromechanical filter capable of operation in the HF to VHF range. As shown, the filter consists of two μ mechanical clamped-clamped beam resonators with anchors 18 at their opposite ends, coupled mechanically by a soft coupling spring or beam 19, all suspended above a substrate (not shown). Conductive (polysilicon) strips 20, 22, 24, and 26 underlie each resonator by approximately 1000 Å (as also in Figures 6, 9 and 17a), a center one 20 serving as a capacitive transducer input electrode positioned to induce resonator vibration in a direction perpendicular to the substrate, a center one 24 serving as an output electrode and the flanking ones 22 and 26 serving as tuning or frequency pulling electrodes capable of voltage-controlled tuning of resonator frequencies. The resonator-to-electrode

gaps are determined by the thickness of a sacrificial oxide spacer during fabrication and can thus be made quite small (*e.g.*, 0.1 μm or less) to maximize electromechanical coupling.

5 The filter is excited with a DC-bias voltage V_p applied to the
conductive mechanical network, and an AC signal applied to the input electrode, but
this time through an appropriately valued source resistance R_Q that loads the Q of
the input resonator to flatten the passband. The output resonator of the filter must
also see a matched impedance to avoid passband distortion, and the output voltage
 v_o is generally taken across this impedance. As described hereinbelow, the required
10 value of I/O port termination resistance can be tailored for different applications,
and this can be advantageous when designing low noise transistor circuits succeeding
the filter, since such circuits can then be driven by optimum values of source
resistance to minimize noise.

15 From a signal flow perspective, the operation of the above filter can
be briefly summarized as follows:

- (1) An electrical input signal is applied to the input port and converted
to an input force by the electromechanical transducer (which for the
case of Figure 5a is capacitive) that can then induce mechanical
vibration in the x direction;
- 20 (2) Mechanical vibration comprises a mechanical signal that is processed
in the mechanical domain — specifically, the signal is rejected if
outside the passband of the filter, and passed if within the passband;
and
- 25 (3) The mechanically processed signal appears as motion of the output
resonator and is reconverted to electrical energy at the output
transducer, ready for processing by subsequent transceiver stages.

From the above, the name “micromechanical signal processor”
clearly suits this device. Details of the design procedure for micromechanical filters
now follow.

HF-VHF Filter Design

As can be summarized from Figure 5b, the network topologies for the mechanical filters of this work differ very little from those of their purely electronic counterparts, and in principal, can be designed at the system-level via a procedure derived from well-known, coupled resonator ladder filter synthesis techniques. In particular, given the equivalent LCR element values for a prototype μ mechanical resonator, it is possible to synthesize a mechanical filter entirely in the electrical domain, converting to the mechanical domain only as the last step. However, although possible, such a procedure is not recommended, since knowledge and ease of design in both electrical and mechanical domains can greatly reduce the effort required.

The design procedure for the two-resonator micromechanical filter of Figure 5a can be itemized as follows:

- (1) Design and establish the μ mechanical resonator prototype to be used, choosing necessary geometries for the needed frequency and insuring that enough electrode-to-resonator transducer coupling is provided to allow for predetermined termination resistor values. For a given resonator, with predetermined values of W_r , h , W_e , V_p , and R_Q , this amounts to solving for the resonator length L_r and electrode-to-resonator gap spacing d that simultaneously satisfy a number of well known equations. Table 2 summarizes the needed gap spacings to achieve various values of R_Q for micromechanical filters centered at 70 MHz and 870 MHz, and with $Q=10,000$, $B=1.25$ MHz, and $V_p=10V$.

Table 2: Two-Resonator μ Mechanical Filter
Electrode-to-Resonator Gap Spacing Design*

| Frequency | Gap Spacing, d , for $R_Q =$ | | | | |
|----------------------|--------------------------------|--------------|----------------|----------------|----------------|
| | 300 Ω | 500 Ω | 1,000 Ω | 2,000 Ω | 5,000 Ω |
| 70 MHz [†] | 195Å | 223Å | 266Å | 317Å | 399Å |
| 870 MHz [‡] | 78Å | 81Å | 80Å | 95Å | 119Å |

* Determined with $Q=10,000$, $B=1.25$ MHz, $V_p=10V$.

[†] CCBear, polysilicon, $L_r=14.52$ μ m, $W_r=8$ μ m, $h=4$ μ m.

[‡] CCBear, diamond, $L_r=9.36$ μ m, $W_r=8$ μ m, $h=4$ μ m.

- (2) Choose a manufacturable value of coupling beamwidth W_{s12} and design coupling beam(s) corresponding to a "quarter-wavelength" of the filter center frequency. Here, the coupling beam is recognized as an acoustic transmission line that can be made transparent to the filter when designed with quarter-wavelength dimensions as described in the prior art.
- (3) Determine the coupling location(s) on the resonators corresponding to the filter bandwidth of interest. This procedure is based upon two important properties of this filter and the resonators comprising it: First, the filter bandwidth B is determined not by absolute values of stiffness, but rather by a ratio of stiffnesses (k_{s12}/k_{rc}), where the subscript c denotes the value at the coupling location; and second, the value of resonator stiffness k_{rc} varies with location (in particular, with location velocity) and so can be set to a desired value by simply choosing an appropriate coupling beam attachment point. The location is easily determined as described in the prior art.
- (4) Generate a complete equivalent circuit for the overall filter and verify the design using a circuit simulator. Figure 5b presents the

equivalent circuit for the two-resonator micromechanical filter of Figure 5a. Each of the outside resonators are modeled via circuits. The coupling beam actually operates as an acoustic transmission line, and thus, is modeled by a T -network of energy storage elements.

5 Transformers are used between the resonator and coupling beam circuits of Figure 5b to model the velocity transformations that arise when attaching the coupling beams at locations offset from the center of the resonator beam. The whole circuit structure of Figure 5b can be recognized as that of the LC ladder network for a bandpass filter.

10 Further details on the design of micromechanical filters can be found in the literature.

RF Micromechanical Filters

As shown in Figure 16, one of the highest demonstrated frequencies to date for polysilicon micromechanical resonators is 92 MHz with a $Q \sim 8,000$. The
15 above-noted patent application Serial No. 09/482,670 also discloses a way of extending the frequency. As shown in Table 1, the above frequency (and higher) is geometrically feasible, but special design and material precautions are necessary to maintain adequate Q as frequencies rise. If Q 's can be maintained $> 5,000$, then record insertion loss performance on the order of 0.5 dB should be achievable,
20 which could greatly enhance the sensitivity of receivers used in both short- and long-range communications. In fact, if $Q \sim 10,000$ can be achieved, then RF channel-selection would be achievable using a switchable bank of filters, one for each channel, as described hereinbelow. The ability to do channel-selection right at the front-end of a transceiver can potentially save substantial amounts of power in both
25 the receive and transmit paths, due to relaxed dynamic range requirements and the ability to use higher efficiency power amplifiers.

Figure 17a is similar to Figure 5a and presents the schematic of a filter structure, along with a partial equivalent electrical circuit of Figure 17b

(obtained via electromechanical analogy) that identifies the mechanical network as a bandpass filter. In particular, the filter structure is seen to be comprised of a number of mechanical resonators (modeled by LCR tanks) connected by acoustic transmission lines (modeled by T-networks of energy storage elements) — a
5 structure similar to other resonator-based filters, but using micromechanical elements with orders of magnitude higher Q , giving it the ability to perform with much lower insertion loss than other technologies. (Not to mention orders of magnitude smaller size.)

In the design of Figure 17a, UHF frequency is obtained via use of a
10 second mode free-free beam resonator including beams 70 and 72 coupled together and to an output beam 74 by coupling beams 73. The resonator is specifically designed to operate at higher modes. The desired mode is selected (while suppressing other modes), by strategic placement and excitation of balanced input electrodes 76 and 78, and by the use of dimples 80 under the beams 70, 72 and 74
15 to force node locations corresponding to the desired mode. Balanced output electrodes 81 are positioned under the output beam 74.

The beams 70 and 74 are supported by non-intrusive supports or beams 82 and 84, respectively, which, in turn, are supported by anchors 86 and 88, respectively.

20 The filter of Figure 17a constitutes the first attempt of its kind to implement filter circuits using free-free beam micromechanical resonators. Unlike previous filters using clamped-clamped beams (that could only attain VHF frequency), both transversal and torsional motions are considered for the coupling beams in Figure 17a.

25 Micromechanical Mixer-Filters

Figure 9 presents the schematic for a symmetrical μ mechanical mixer-filter, showing the bias and input scheme required for down-conversion with a gain stage. As shown, since this device provides filtering as part of its function,

the overall mechanical structure is exactly that of a μ mechanical filter. The only differences are the applied inputs and the use of a non-conductive coupling beam to isolate the IF port from the LO. If the source providing V_p to the second resonator is ideal (with zero source resistance) and the series resistance in the second resonator is small, LO signals feeding across the coupling beam capacitance are shunted to AC ground before reaching the IF port. In reality, finite resistivity in the resonator material allows some amount of LO-to-IF leakage.

The mixer conversion gain/loss in this device is determined primarily by the relative magnitudes of the DC-bias V_p applied to the resonator and the local oscillator amplitude V_{LO} .

In general, conversion gain is possible if $V_{LO} > V_p$.

Micromechanical Switches

The mixer-filter device described above is one example of a μ mechanical circuit that harnesses non-linear device properties to provide a useful function. Another very useful mode of operation that further utilizes the non-linear nature of the device is a μ mechanical switch. Figure 8 presents an operational schematic for a μ mechanical switch. A conductive or actuation plate 30 is suspended above a pair of actuation electrodes 32 by suspension beams 34 having anchors 36. A switch conductor portion 38 of the plate 30 is suspended over a pair of grounds 40 and a sense electrode or conductor 42. When the switch is in the "on-state" here, the conductor 42 is shorted to the grounds 40. The operation of the switch of Figure 8 is fairly simple: To achieve the "on-state" for one of the electrodes apply a sufficiently large voltage across the plate and a desired electrode to pull that part of the plate down and short it (in either a DC or AC fashion) to the desired electrode.

In general, to minimize insertion loss, the majority of switches use metals as their structural materials. It is their metal construction that makes μ mechanical switches so attractive, allowing them to achieve "on-state" insertion

losses down to 0.1 dB — much lower than FET transistor counterparts, which normally exhibit ~ 2 dB of insertion loss. In addition to exhibiting such low insertion loss, μ mechanical switches are extremely linear, with IIP3's greater than 66 dBm, and can be designed to consume no DC power (as opposed to FET switches, which sink a finite current when activated).

RF Receiver Front-End Architectures Using MEMS

The methods by which the above-noted mechanical circuits are best incorporated into communications sub-systems are now considered. Three approaches to using micromechanical vibrating resonators are described in order of increasing performance enhancement:

- 1) Direct replacement of off-chip high- Q passives;
- 2) Use of an RF channel select architecture using a large number of high- Q micromechanical resonators in filter banks and switchable networks; and
- 3) Use of an all-mechanical RF front-end.

In the RF channel-select architecture, μ mechanical circuits are assumed to be able to operate at UHF with Q 's on the order of 10,000. However, this isn't absolutely necessary. It is needed for today's communications, but in the future, a communications standard may come about that allows even less Q .

Direct Replacement of Off-Chip High- Q Passives

Perhaps the most direct way to harness μ mechanical circuits is via direct replacement of the off-chip ceramic, SAW, and crystal resonators used in RF preselect and image reject filters, IF channel-select filters, and crystal oscillator references, as illustrated in Figures 1 and 3. In addition to high- Q components, Figure 3 also shows the use of other MEMS-based passive components, such as medium- Q micromachined inductors and tunable capacitors used in VCO's and matching networks, as well as low-loss (~0.1 dB) μ mechanical switches that not

only provide enhanced antenna diversity, but that can also yield power savings by making TDD (rather than FDD) more practical in future transceivers.

Of course, the main benefits from the above approach to using MEMS are size reduction and, given the potential for integration of MEMS with transistor circuits, the ability to move more components onto the silicon die. A limited number of performance benefits also result from replacement of existing high- Q passives by μ mechanical ones, such as the ability to tailor the termination impedances required by RF and IF filters (c.f., Table 2). Such impedance flexibility can be beneficial when designing low-noise amplifiers (LNA's) and mixers in CMOS technology, which presently often consume additional power to impedance match their outputs to 50Ω off-chip components. If higher impedances can be used, for example at the output of an LNA, significant power savings are possible. As an additional benefit, since the source impedance presented to the LNA input is now equal to R_Q , it can now be tailored to minimize noise figure (NF).

Although beneficial, the performance gains afforded by mere direct replacement by MEMS are quite limited when compared to more aggressive uses of MEMS technology. More aggressive architectures are described hereinbelow.

An RF Channel-Select Architecture

To fully harness the advantages of μ mechanical circuits, one must first recognize that due to their micro-scale size and zero DC power consumption, μ mechanical circuits offer the same system complexity advantages over off-chip discrete components that planar IC circuits offer over discrete transistor circuits. Thus, to maximize performance gains, μ mechanical circuits should be utilized on a massive scale, or at least as much as possible.

Perhaps one of the simplest ways to harness the small size of micromechanical circuits is to add multi-band reconfigurability to a transceiver by adding a preselect and image reject filter for each communication standard included.

Due to the small size of micromechanical filters, this can be done with little regard to the overall size of the transceiver.

Although the above already greatly enhances the capability of today's wireless transceivers, it in fact only touches upon a much greater potential for performance enhancement. In particular, it does not utilize micromechanical circuits to their fullest complexity. Figure 6 presents the system-level block diagram for a possible receiver front-end architecture that takes full advantage of the complexity achievable via μ mechanical circuits, such as the micromechanical filter of Figure 5a. The main driving force behind this architecture is power reduction, attained in several of the blocks by trading power for high selectivity (*i.e.*, high- Q). The key power saving blocks in Figure 6 are now described.

Switchable RF Channel-Select Filter Bank

If channel selection (rather than pre-selection) were possible at RF frequencies (rather than just an IF), then succeeding electronic blocks in the receive path (*e.g.*, LNA, mixer) would no longer need to handle the power of alternate channel interferers. Thus, their dynamic range can be greatly relaxed, allowing substantial power reductions. In addition, the rejection of adjacent channel interferers also allows reductions in the phase noise requirements of local oscillator (LO) synthesizers, providing further power savings.

To date, RF channel selection has been difficult to realize via present-day technologies. In particular, low-loss channel selection at RF would require tunable resonators with Q 's in the thousands. Unfortunately, however, high- Q often precludes tunability, making RF channel selection via a single RF filter a very difficult prospect.

On the other hand, it is still possible to select individual RF channels via many non-tunable, or slightly tunable, high- Q filters, one for each channel, and each switchable (and tunable) by command. Depending upon the standard, this could entail hundreds or thousands of filters — numbers that would be absurd if off-

chip macroscopic filters are used, but that may be perfectly reasonable for microscale, passive, μ mechanical filters, such as previously described.

Figure 7 presents one fairly simple rendition of the key system block that realizes the desired RF channel selection. As shown, this block consists of a bank of μ mechanical filters with all filter inputs connected to a common block input and all outputs to a common block output, and where each filter passband corresponds to a single channel in the standard of interest. However, it is to be noted that it does not have to be limited to a single channel. It could also be several channels as well (*e.g.*, 3 channels) and this could still be very advantageous, depending upon the communications standard.

In the scheme of Figure 7, a given filter is switched on (with all others off) by decoder-controlled application of an appropriate DC-bias voltage to the desired filter. The desired force input and output current are generated in a μ mechanical resonator only when a DC-bias V_p is applied (*i.e.*, without V_p , the input and output electrodes are effectively open-circuited).

The potential benefits afforded by this RF channel selector can be quantified by assessing its impact on the LNA linearity specification imposed by the IS-98-A interim standard for CDMA cellular mobile stations. In this standard, the required IIP3 of the LNA is set mainly to avoid desensitization in the presence of a single tone (generated by AMPS) spaced 900 kHz away from the CDMA signal center frequency. Here, reciprocal mixing of the local oscillator phase noise with the 900 kHz offset single tone and cross-modulation of the single tone with leaked transmitter power outputs dictate that the LNA IIP3 exceeds +7.6 dBm. However, if an RF channel-select filter bank such as shown in Figure 7 precedes the LNA and is able to reject the single tone by 40 dB, the requirement on the LNA then relaxes to $\text{IIP3} \leq -29.3 \text{ dBm}$ (assuming the phase noise specification of the local oscillator is not also relaxed). Given the well known noise and linearity versus power trade-offs available in LNA design, such a relaxation in IIP3 can result in nearly an order of magnitude reduction in power. In addition, since RF channel selection relaxes the overall receiver linearity requirements, it may become possible to put more gain

in the LNA to suppress noise figure (NF) contributions from later stages, while relaxing the required NF of the LNA itself, leading to further power savings.

Turning to oscillator power, if the single tone interferer is attenuated to 40 dB, then reciprocal mixing with the local oscillator is also greatly attenuated, allowing substantial reduction in the phase noise requirement of the local oscillator. Requirement reductions can easily be such that on-chip solutions to realization of the receive path VCO (*e.g.*, using spiral inductors and pn-diode tunable capacitors) become plausible.

Practical implementations of the switchable filter bank require multiplexing support electronics that must interconnect with each μ mechanical device. If implemented using a two-chip approach, the number of chip-to-chip bonds required could become quite cumbersome, making a single-chip solution desirable.

In the pursuit of single-chip systems, several technologies that merge micromachining processes with those for integrated circuits have been developed and implemented over the past several years. These technologies can be categorized into three major approaches: mixed circuit and micromechanics, pre-circuits, and post-circuits. These technologies, however, are well known in the art and are not discussed herein.

Switchable Micromechanical Resonator Synthesizer

Although the μ mechanical RF channel selector described above with reference to Figures 5, 6 and 7 may make possible the use of existing on-chip technologies to realize the receive path VCO as shown in Figure 3, this approach is not recommended, since it denies the system from achieving much greater power reduction factors that may soon be available through MEMS technology. In particular, given that power and Q can often be interchanged when designing for a given oscillator phase noise specification, a better approach to implementing the VCO would be to use μ mechanical resonators (with orders of magnitude higher Q

than any other on-chip tank) to set the VCO frequency. In fact, with Q 's as high as achievable via μ mechanics, the basic design methodologies for oscillators must be re-evaluated. For example, in the case where the oscillator and its output buffer contribute phase noise according to Leeson's equation, where the $1/f^2$ -to-white phase noise corner occurs at $(f_o/(2Q))$, a tank $Q > 1,500$ is all that would be required to move the $1/f^2$ -to-white phase noise corner close enough to the carrier that only white phase noise need be considered for CDMA cellular applications, where the phase noise power at frequency offsets from 285 kHz to 1515 kHz is most important. If only white noise is important, then only the output buffer noise need be minimized, and sustaining amplifier noise may not even be an issue. If so, the power requirement in the sustaining amplifier might be dictated solely by loop gain needs (rather than by phase noise needs), which for a μ mechanical resonator-based VCO with $R_x \sim 40\Omega$, $L_x \sim 84\mu H$, and $C_x \sim 0.5fF$, might be less than 1 mW.

To implement a tunable local oscillator synthesizer, a switchable bank, similar to that of Figure 7 but using μ mechanical resonators 46, not filters, each corresponding to one of the needed LO frequencies, and each switchable into or out of an oscillator sustaining circuit 48 by transistor switches 49 at their electrodes 51 is illustrated in Figure 11 and is preferred over the tuning-fork-resonator oscillator 50 illustrated in Figure 10. Because μ mechanical resonators are now used in this implementation, the Q and thermal stability of the oscillator may now be sufficient to operate without the need for locking to a lower frequency crystal reference. The power savings attained upon removing the PLL and prescaler electronics needed in past synthesizers can obviously be quite substantial. In effect, by implementing the synthesizer using μ mechanical resonators, synthesizer power consumption can be reduced from the ~ 90 mW dissipated by present-day implementations using medium- Q L and C components, to something in the range of only 1-4 mW. Again, all this is attained using a circuit topology that would seem absurd if only macroscopic high- Q resonators were available, but that becomes plausible in the micromechanical arena.

Figure 11 presents the basic topology of the LO synthesizer. Here, rather than tune a single medium Q resonator such as done in present-day VCO's,

a bank of numerous switchable high- Q ($Q > 5,000$) micromechanical resonators is utilized, where each resonator corresponds to one of the needed frequencies in a given communications network. In this scheme, no phase-locking circuit is required, since the local oscillator merely switches the appropriate resonator into the
5 oscillator feedback loop to generate the needed output frequency. Because the Q of the micromechanical resonators are orders of magnitude higher than before ($Q \sim 5,000$, as opposed to 40), the phase noise performance of this oscillator should be orders of magnitude better than present-day VCO's. In fact, with such a high Q , the $1/f^2$ -to-white noise corner frequency of the standard phase noise vs. frequency
10 plot may be so close to the carrier, that $1/f^2$ noise may no longer be a major consideration, and only white noise is present at the important frequency offsets. In this case, power could be traded for Q to such an extent that it may become possible to operate the oscillator with less than 1 mW of power consumption. Combined with the fact that phase-locking is no longer required in the scheme of
15 Figure 11, this constitutes more than 90 mW of power savings, while improving the performance of the oscillator.

The controller of Figure 11 preferably switches in a loss mechanism (e.g., a resistance) that lowers the Q of a resonator so that start-up of oscillation is faster. Once the amplitude of oscillation has reached steady-state, the controller
20 switches out the loss so the oscillation can have high Q characteristics (e.g., lower phase noise, low temperature dependence.)

The resistance is typically a Q -loading resistor, R_Q , for fast start-up. Such a resistor is desirable to make sure that a given oscillator can start-up fast from rest: high $Q \rightarrow$ slow start-up; and low $Q \rightarrow$ fast start-up.

25 For start-up, an R_Q should be switched in at first (i.e., for low $Q \rightarrow$ fast start-up). Then, remove the R_Q when steady state is recorded, for high Q and good phase noise.

It should be emphasized that the oscillator scheme of Figure 11 would
30 be difficult to practically realize without MEMS technology — in particular, without

its ability to attain Q 's $> 5,000$ in such a tiny size. Specifically, present-day LO synthesizers are constrained to use low- Q tanks in their VCO's because such tanks are much more tunable than their high- Q counterparts; *i.e.*, high- Q generally implies low tunability. Thus, to attain tunability using high- Q resonators, many
5 resonators are required, one for each frequency to be generated. This, of course, would require an absurdly large volume if macroscopic high- Q components are utilized. With μ mechanical high- Q elements, however, hundreds or even thousands of resonators can fit within a $0.5 \times 0.5 \text{ cm}^2$ area, so the synthesizer architecture of Figure 11 becomes plausible.

10 A single-chip LO synthesizer, using the architecture of Figure 11 can achieve impressive phase noise performance at UHF frequencies ($\sim 800 \text{ MHz}$). By using higher-mode, free-free beam resonator designs previously described, UHF (and possibly S-Band or higher) frequency synthesizers are feasible. K- or Ka-Band applications are not unreasonable, and should benefit from the architecture of Figure
15 11 either directly as shown, or indirectly, since a UHF high- Q reference oscillator should greatly improve the stability of K- or Ka-band synthesizers.

Micromechanical Mixer-Filter

The use of a μ mechanical mixer-filter in the receive path as illustrated in Figure 9 eliminates the DC power consumption associated with the active mixer
20 normally used in present-day receive architectures. The mixer-filter-gain stage includes a pair of n-type resonators 21,23 coupled together by a p-type or undoped beam or spring 19 similar to filters of Figures 5a and 6.

This corresponds to a power savings on the order of 10-20- mW. In addition, if multiple input electrodes (one for RF, one for matching) are used for the
25 mixer-filter, the RF input can be made to appear purely capacitive to the LNA (*i.e.*, at the RF frequency), and the LNA would no longer require a driver stage to match a certain impedance. Rather, an inductive load can be used to resonate the capacitance, allowing power savings similar to that previously discussed in association with impedance matching.

An All-MEMS RF Front-End Receiver Architecture

In the above MEMS-based architecture, if μ mechanical filters and mixer-filters can post insertion losses consistent with their high- Q characteristics, then an LNA is not really required at RF frequencies, as illustrated by phantom lines
5 for the LNA in Figure 12. Figure 13 depicts a receive path comprised of a relatively wideband image reject μ mechanical RF filter followed immediately by a narrowband IF mixer-filter that then feeds subsequent IF electronics. The only active electronics operating at RF in this system are those associated with the local oscillator, which if it uses a bank of μ mechanical resonators as previously described,
10 may be able to operate at less than 1 mW. The architecture of Figure 13 clearly presents enormous power advantages, eliminating completely the power consumption of the LNA and active mixer of Figure 3 — a total power savings on the order of 40 mW — and together with the 90 mW of power savings from the micromechanical LO, substantially increasing mobile phone standby times.

15 An RF Transmitter Architecture Using MEMS

Due to a lack of sufficient in-band power handling capability, very little consideration has been given to date to the possibility of using μ mechanical resonators in the transmit path.

Figure 14 depicts one rendition, in which an RF channel selector is
20 placed after the power amplifier (PA) in the transmit path. This channel selector uses a similar circuit as that of Figure 7, but using μ mechanical resonators with sufficient power handling capability. This transmit topology provides enormous power savings. In particular, the high- Q , high-power filter with less than 1 dB of insertion loss follows the PA, cleaning all spurious outputs, including those arising
25 from spectral regrowth. Consequently, more efficient PA designs can be utilized, despite their non-linearity. For example, a PA previously restricted by linearity considerations to 30% efficiency in present-day transmitter architectures, may now be operable closer to its maximum efficiency, perhaps 50%. For a typical transmit power of 600 mW, this efficiency increase corresponds to 800 mW of power

savings. If a more efficient PA topology could be used, such as Class E, with theoretical efficiencies approaching 100%, the power savings could be much larger.

In addition to the MEMS-based channel-select RF filter bank, the architecture of Figure 14 also features a micromechanical upconverter that uses a mixer-filter device, such as previously described, to upconvert and filter the information signal before directing it to the power amplifier.

There are two preferred methods for using the structure of the upper part of Figure 9 as an upconverting device. In the first method, the baseband signal at frequency ω_{IF} to be upconverted is applied to the input electrode 20 and the upconverting carrier signal at frequency ω_{LO} is applied to the input resonator device 21. Upconversion occurs through mixing around the nonlinear capacitive transducer between the input electrode 20 and the resonator 21. Specifically, the electrical baseband information signal at frequency ω_{IF} is upconverted to a force at frequency $\omega_{LO} + \omega_{IF}$. This force is then filtered by the filter structure of Figure 9, which is now designed to have a passband around $\omega_{LO} + \omega_{IF}$. If this passband is made small enough, channel selection to the point of removing not only distortion harmonics, but also spectrally regrown components, is possible. By placing a dc-bias V_p on the output resonator 23, the displacement of this resonator is converted to an electrical output voltage or current, depending upon the output load. It should be noted, also, that gain is possible in upconverting the baseband signal to the RF signal, so this stage also serves as a gain stage, as well.

The second method for upconversion, involves filtering the based band signal first, then upconverting. In this method, the baseband signal is again applied to the input electrode 20, but the dc-bias is applied to the input resonator, and the carrier signal to the output resonator. This way, the baseband signal is first filtered by the structure, then upconverted at the output via electromechanical amplitude modulation. Again, gain is possible in this configuration.

High power handling micromechanical resonators may use alternative geometries (*e.g.*, no longer flexural mode) and the use of alternative transduction (*e.g.*, piezoelectric, magnetostrictive).

Summary

5 Vibrating μ mechanical resonators constitute the building blocks for
a new integrated mechanical circuit technology in which high Q serves as a principal
design parameter that enables more complex circuits. By combining the strengths
of integrated μ mechanical and transistor circuits, using both in massive quantities,
10 previously unachievable functions become possible that enable transceiver
architectures with projections for orders of magnitude performance gains. In
particular, with the addition of high- Q μ mechanical circuits, paradigm-shifting
transceiver architectures that trade power for selectivity (*i.e.*, Q) become possible,
with the potential for substantial power savings and multi-band reconfigurability.

15 While the best mode for carrying out the invention has been described
in detail, those familiar with the art to which this invention relates will recognize
various alternative designs and embodiments for practicing the invention as defined
by the following claims.

WHAT IS CLAIMED IS:

- 1 1. A method for generating a signal having at least one desired
2 output frequency in a system in response to a tuning voltage and without the need
3 for a phase-locking circuit, the method comprising:
4 providing a bank of micromechanical devices;
5 vibrating one or more of the devices so that each vibrating device
6 generates a signal having an output frequency; and
7 controllably selecting one or more of the vibrating devices to generate
8 a signal having the at least one desired output frequency in response to the tuning
9 voltage.
- 1 2. The method as claimed in claim 1 wherein each of the devices
2 has a Q in excess of 100.
- 1 3. The method as claimed in claim 2 wherein each of the devices
2 has a Q in excess of 1000.
- 1 4. The method as claimed in claim 1 wherein the devices number
2 more than 10.
- 1 5. The method as claimed in claim 4 wherein the devices number
2 more than 100.
- 1 6. The method as claimed in claim 5 wherein the devices number
2 more than 1000.
- 1 7. The method as claimed in claim 1 wherein the desired output
2 frequency is more than 300 MHz.
- 1 8. The method as claimed in claim 1 wherein each of the devices
2 has a frequency which is switchable and tunable.

1 9. The method as claimed in claim 1 wherein each of the devices
2 has an adjustable Q and wherein the method further comprises lowering the Q of the
3 at least one vibrating device having the at least one desired output frequency initially
4 during the step of vibrating and then raising the Q during the step of vibrating.

1 10. The method as claimed in claim 9 wherein the step of
2 lowering includes the step of controllably coupling at least one circuit element to the
3 at least one vibrating device having the at least one desired frequency and the step
4 of raising includes the step of controllably decoupling the at least one circuit element
5 from the at least one vibrating device having the at least one desired frequency.

1 11. A local oscillator synthesizer apparatus for generating a signal
2 having at least one desired output frequency in a system in response to a tuning
3 voltage and without the need for a phase-locking circuit, the apparatus comprising:
4 a parallel bank of micromechanical resonators, each of the resonators
5 corresponding to a frequency; and
6 a controller for selecting at least one desired resonator of the bank of
7 resonators to thereby provide frequency selection.

1 12. The apparatus as claimed in claim 11 further comprising an
2 oscillator sustaining circuit wherein each of the resonators is switchable into or out
3 of the oscillator sustaining circuit by the controller.

1 13. The apparatus as claimed in claim 11 wherein the controller
2 includes a decoder for controlling application of an appropriate bias voltage to the
3 at least one desired resonator.

1 14. The apparatus as claimed in claim 11 wherein the resonators
2 are interlinked and wherein each of the resonators has an input connected to a
3 common input and each of the resonators has an output connected to a common
4 output.

1 15. The apparatus as claimed in claim 11 wherein each of the
2 resonators has a predetermined Q and wherein the controller also selectively
3 switches at least one circuit element to the at least one desired resonator to lower the
4 Q of the at least one desired resonator from its predetermined Q and selectively
5 switches the at least one circuit element from the at least one desired resonator to
6 raise the Q of the at least one desired resonator to its predetermined Q.

1 16. The apparatus as claimed in claim 11 wherein the frequency
2 of each of the resonators is switchable and tunable.

1/12

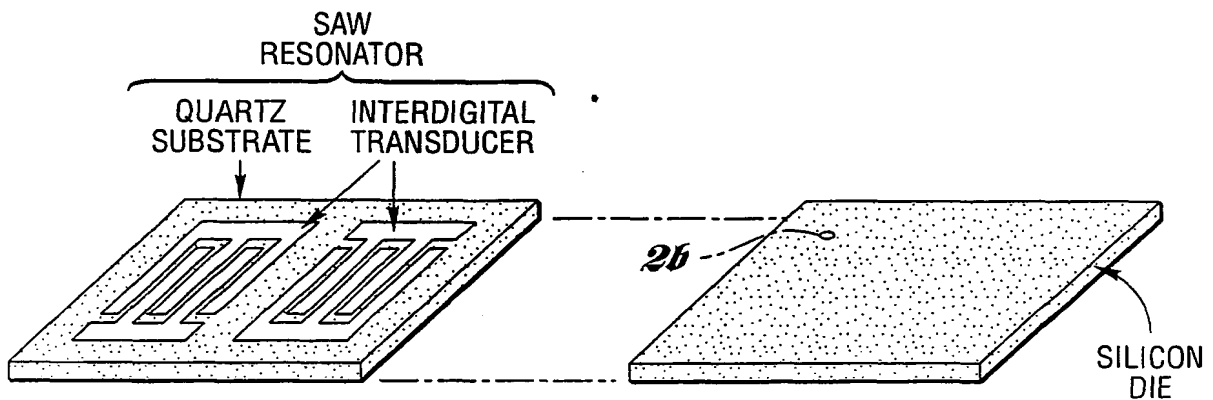
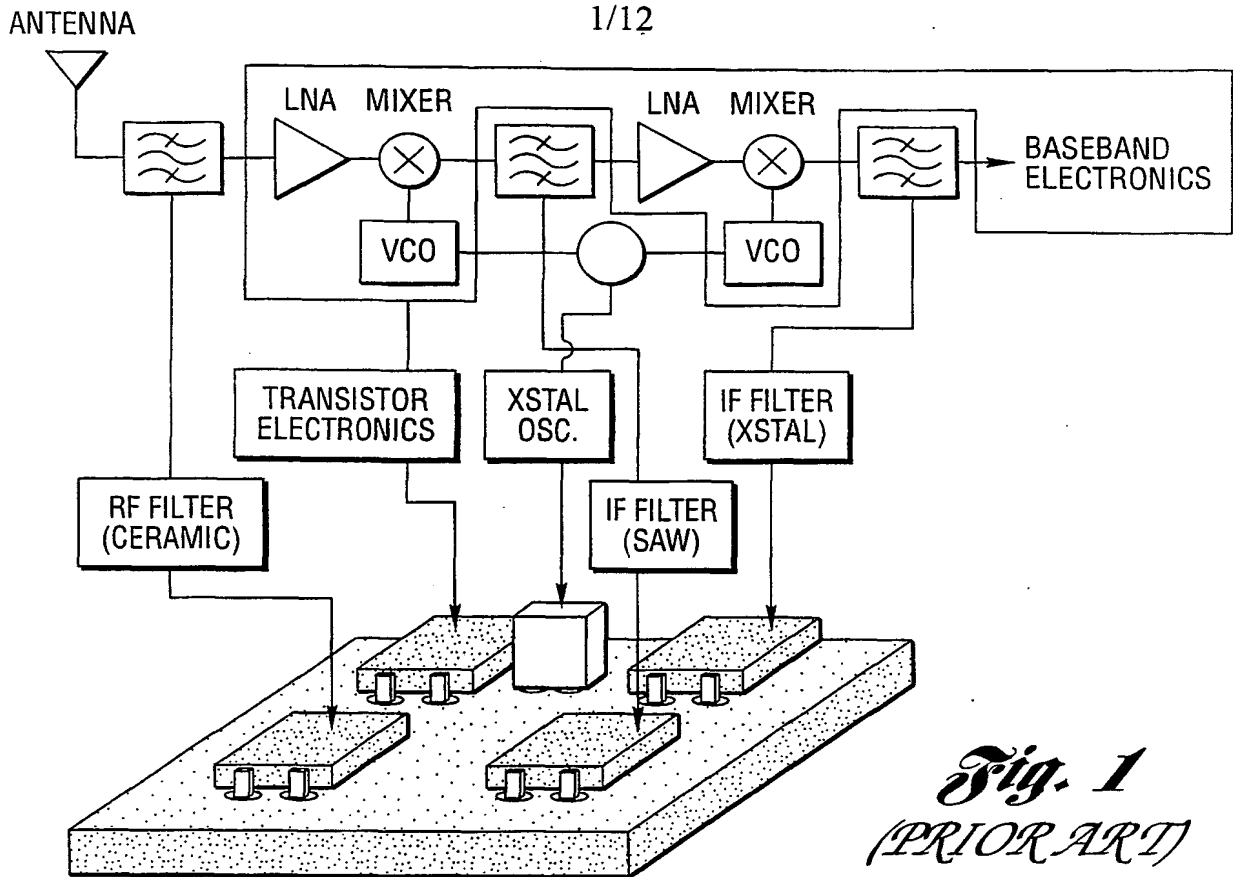


Fig. 2a (PRIOR ART)

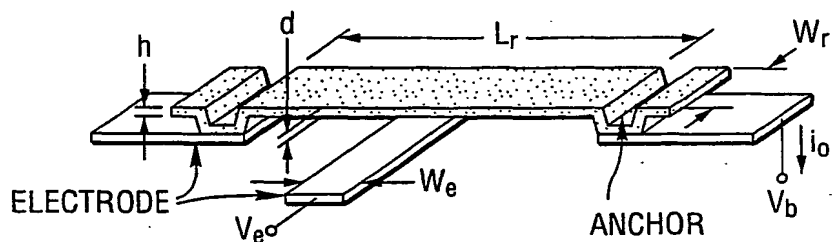


Fig. 2b (PRIOR ART)

2/12



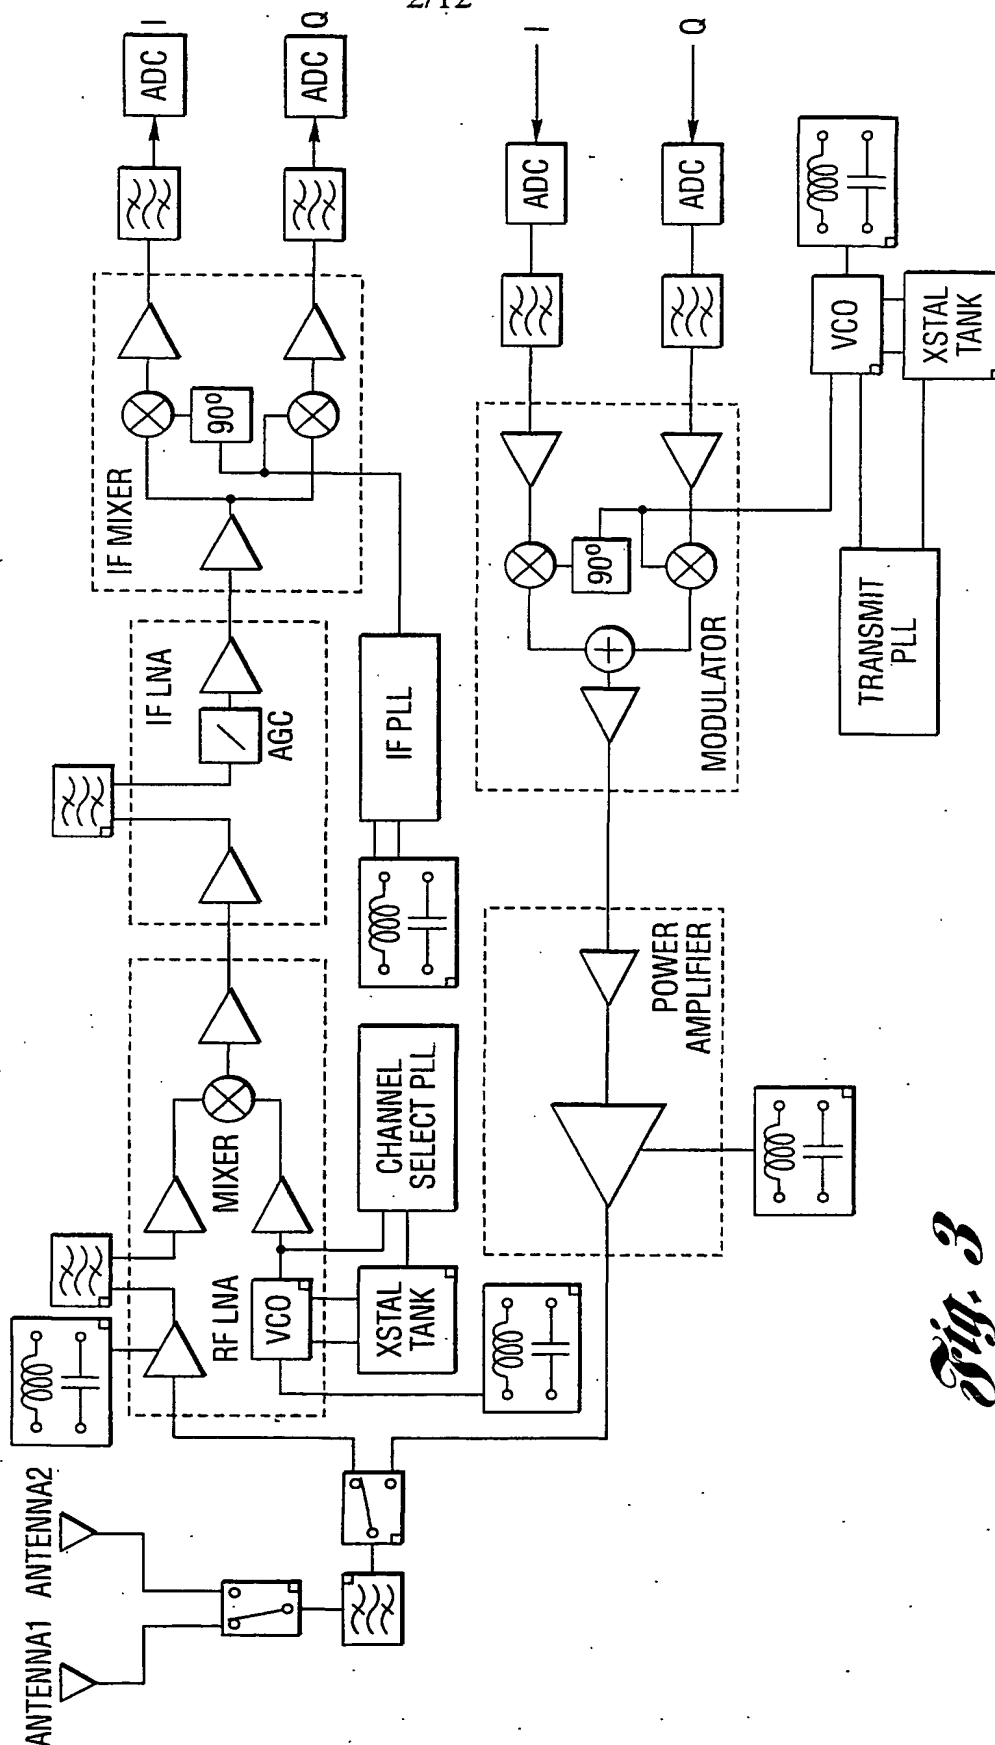


Fig. 3

3/12

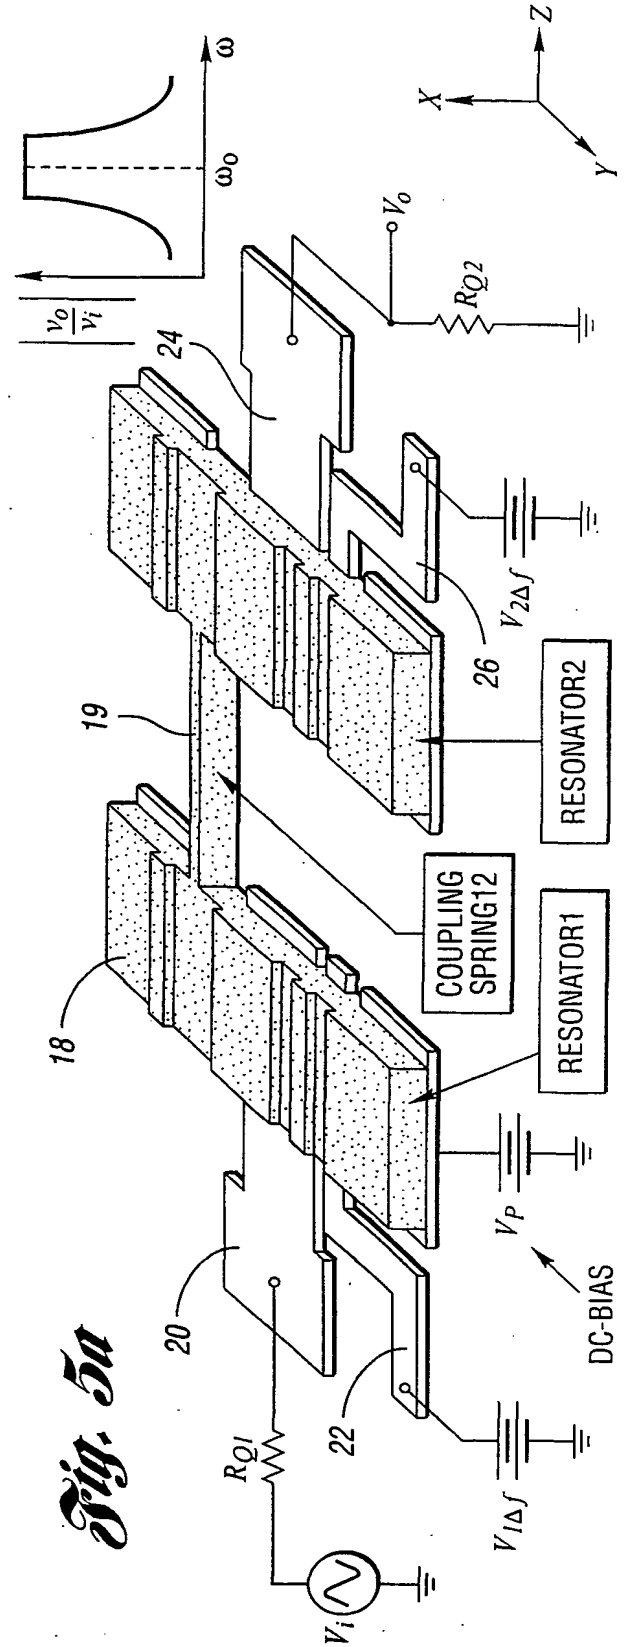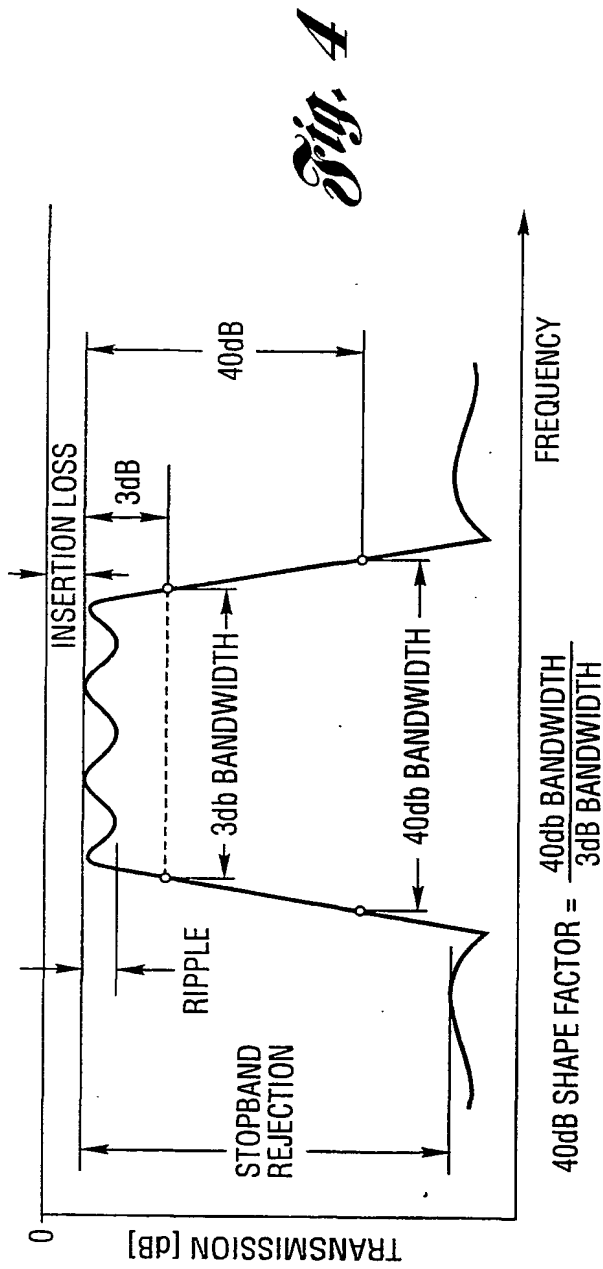

4/12

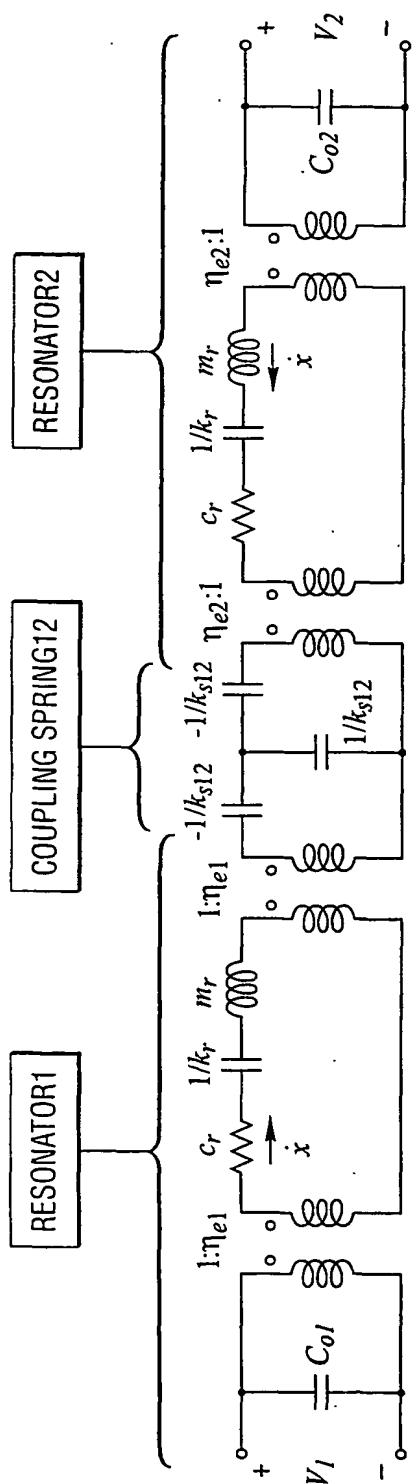


Fig. 5b


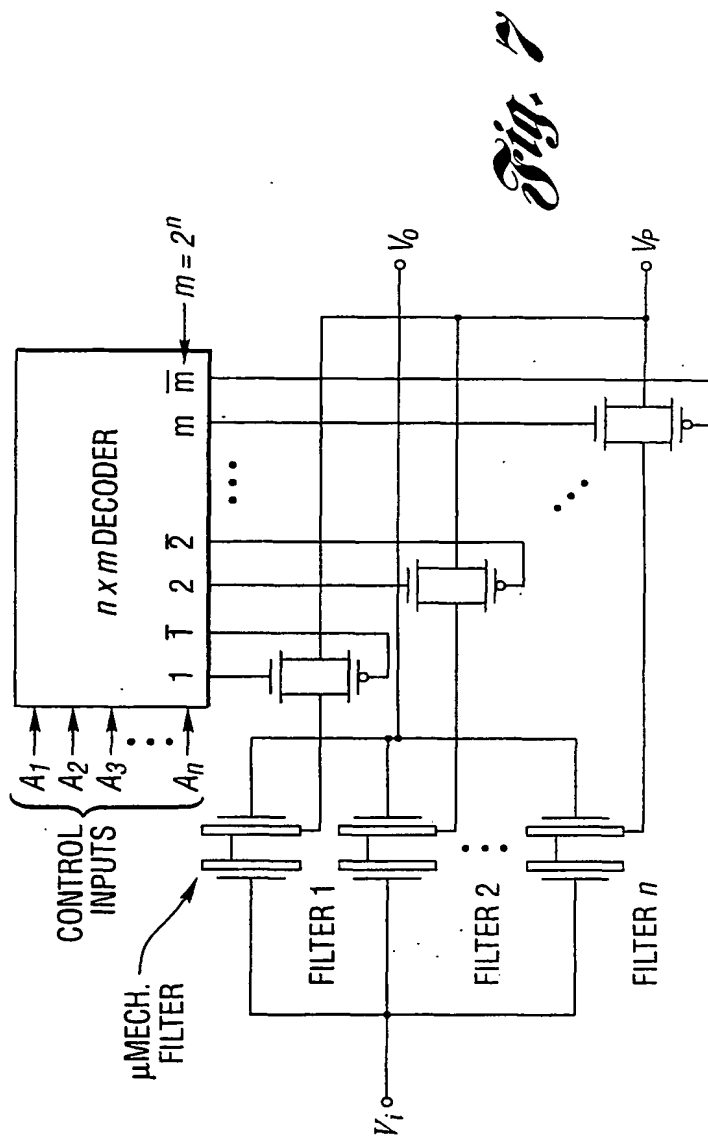



Fig. 7

5/12

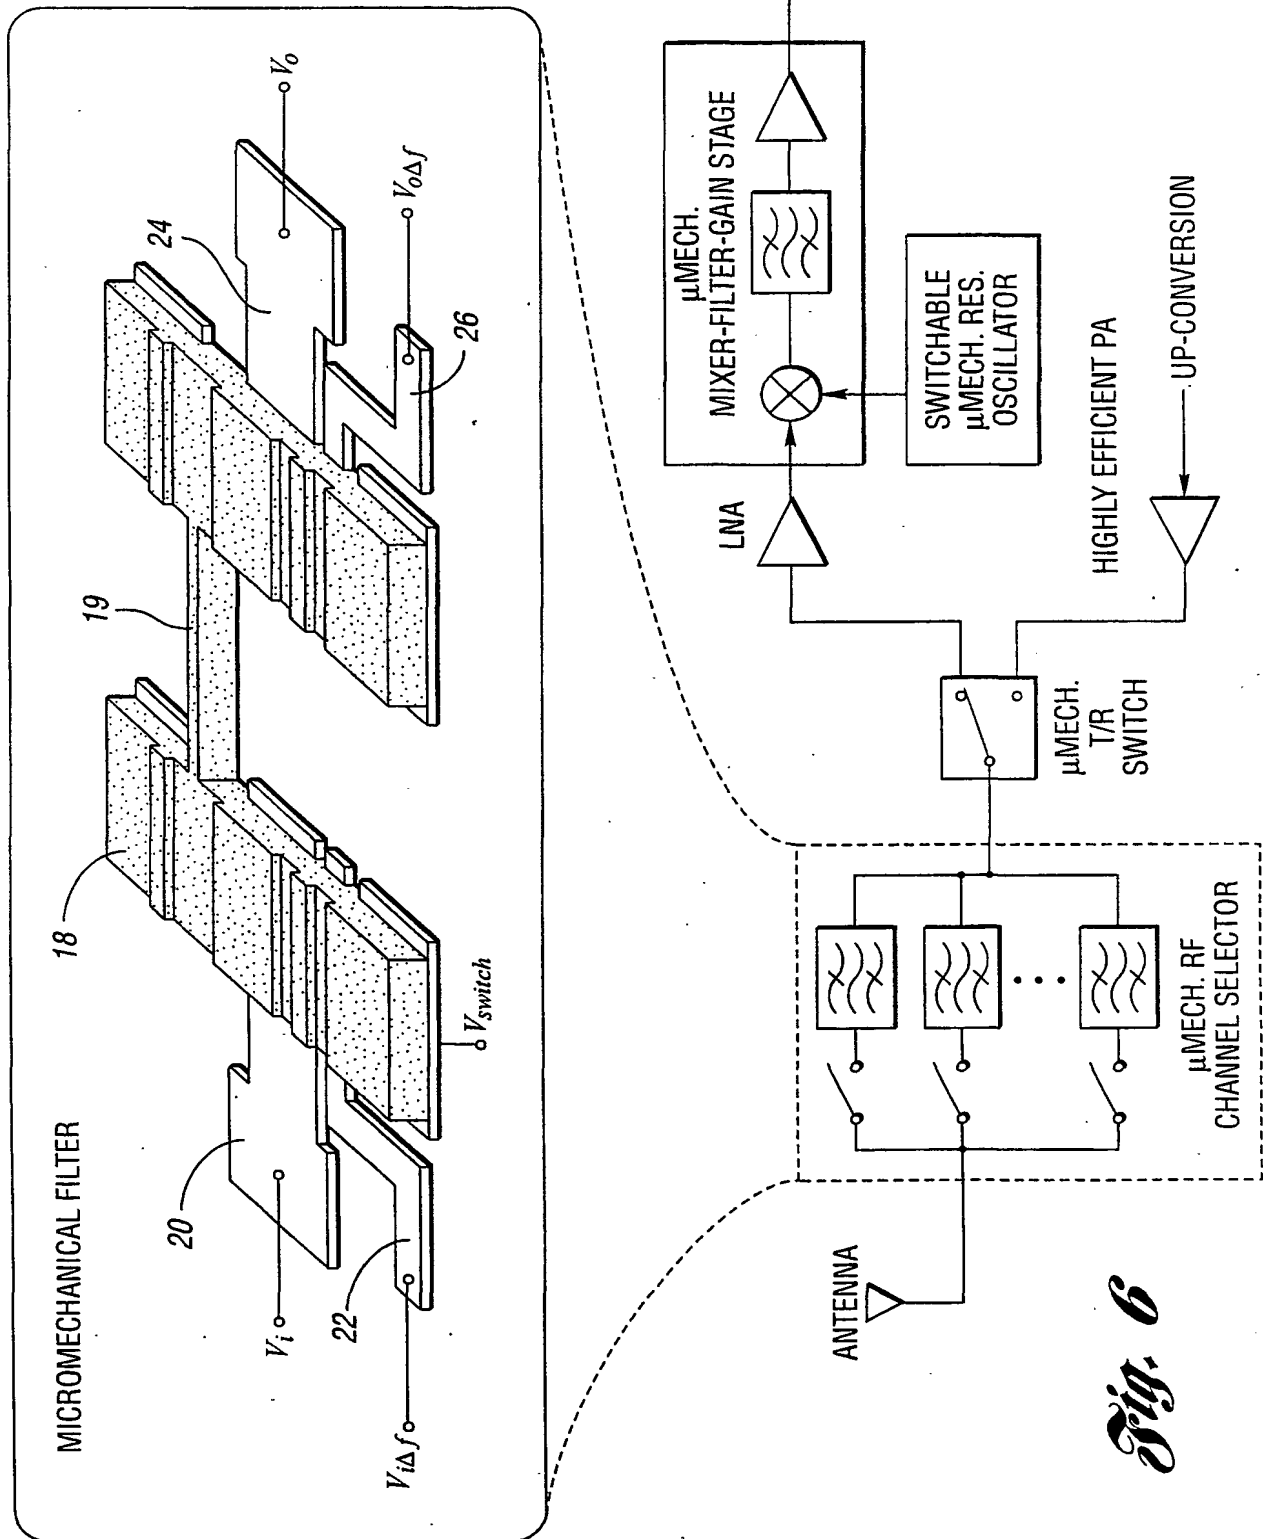

6/12

Fig. 8

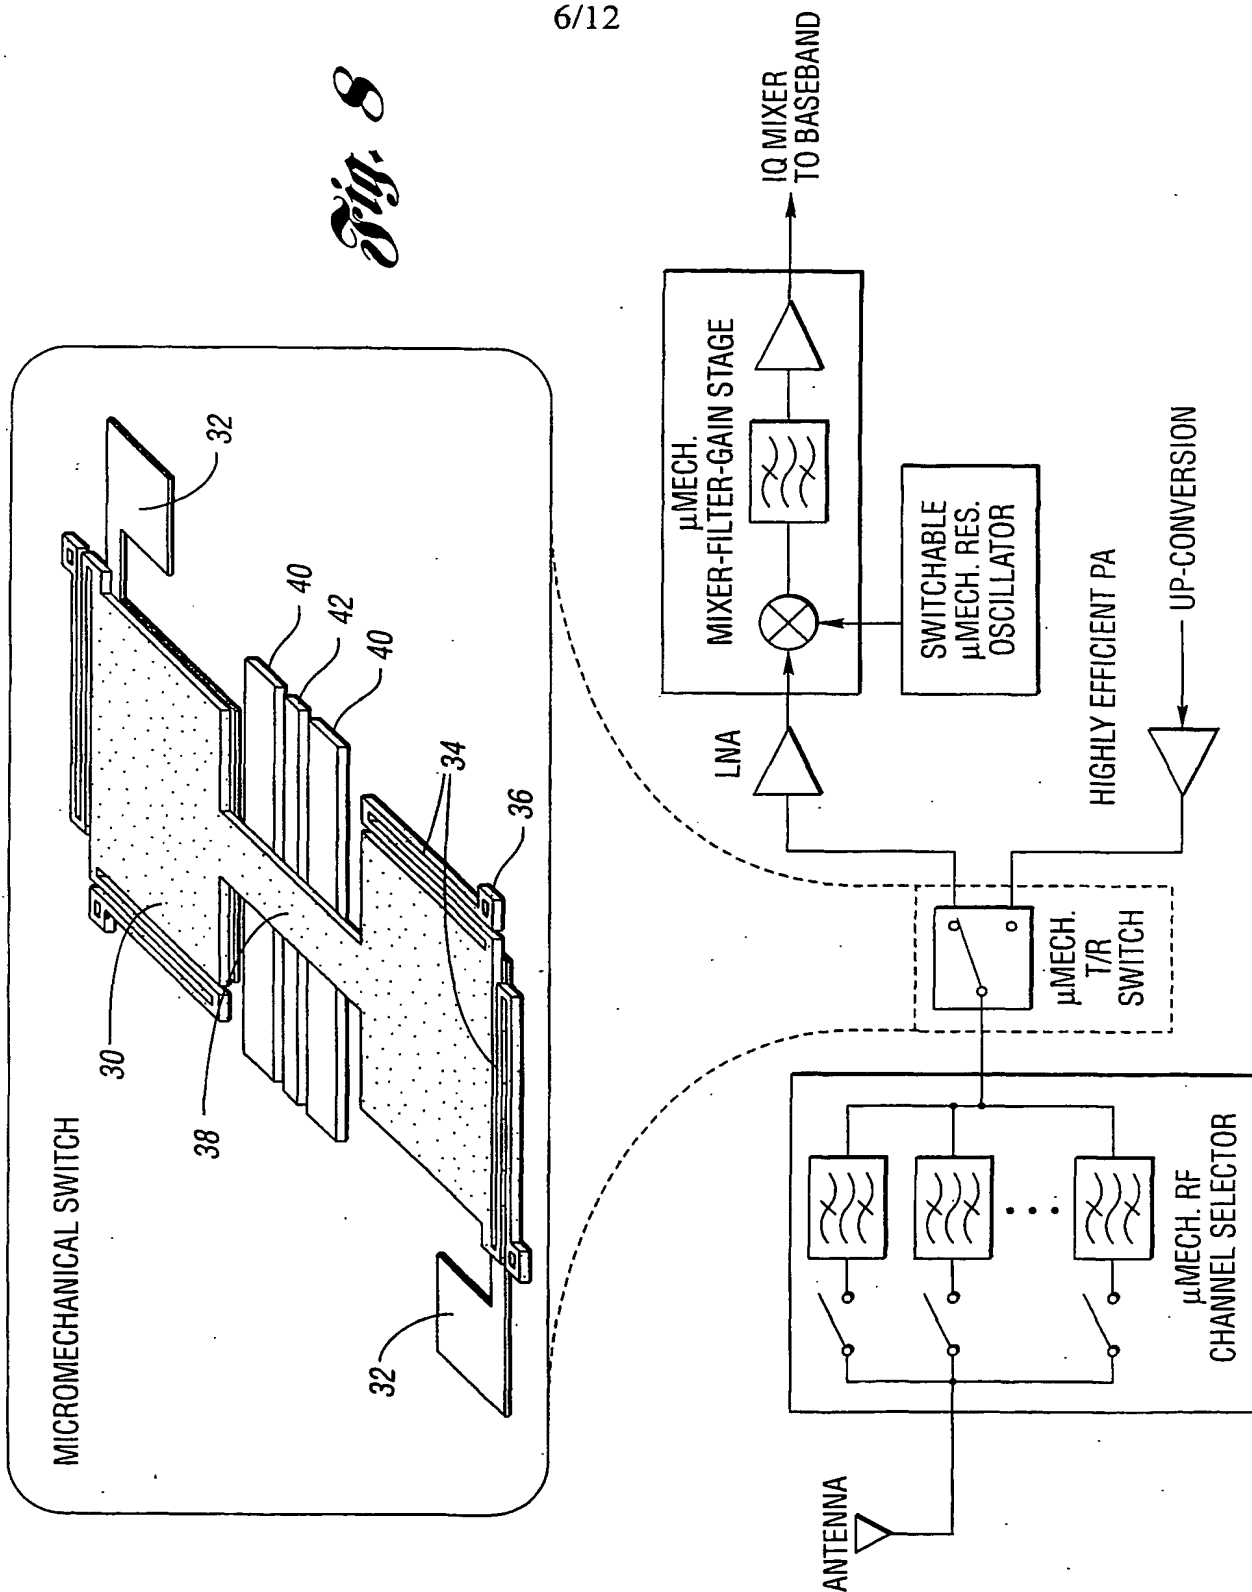

7/12


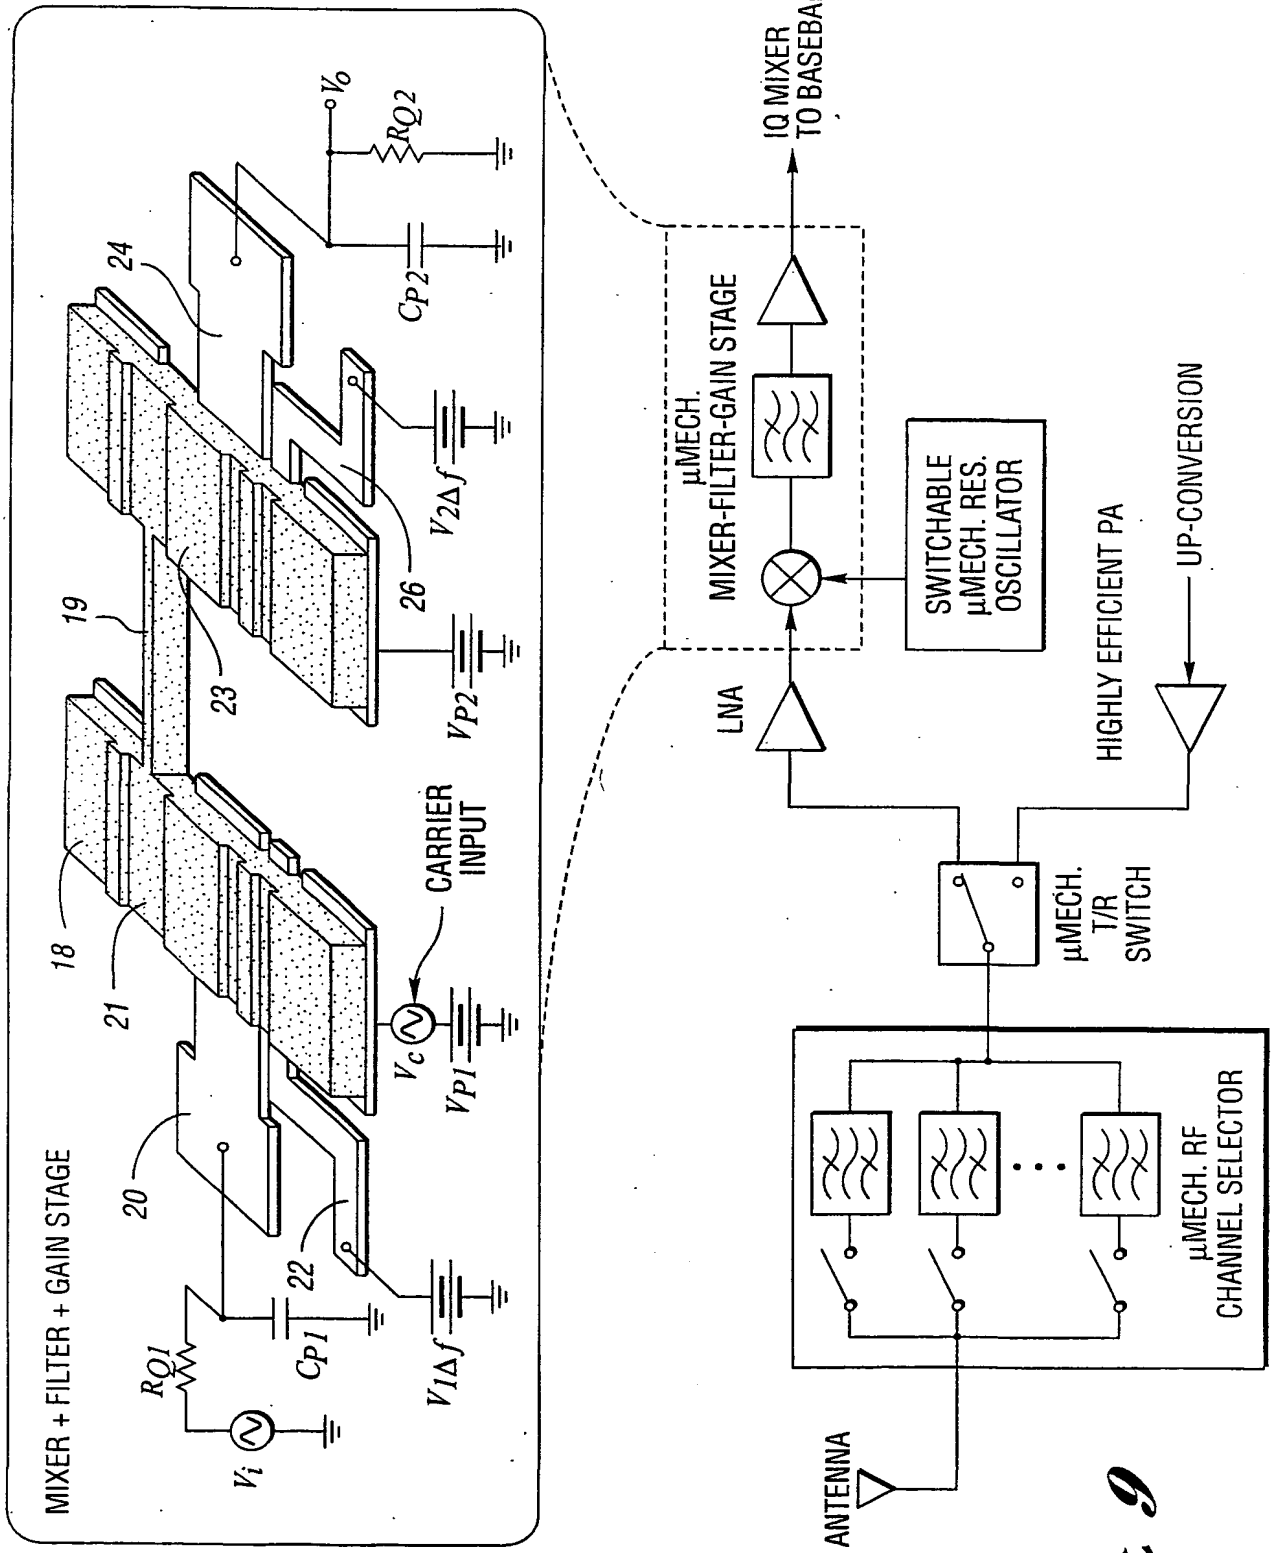




Fig. 9

8/12

Fig. 10

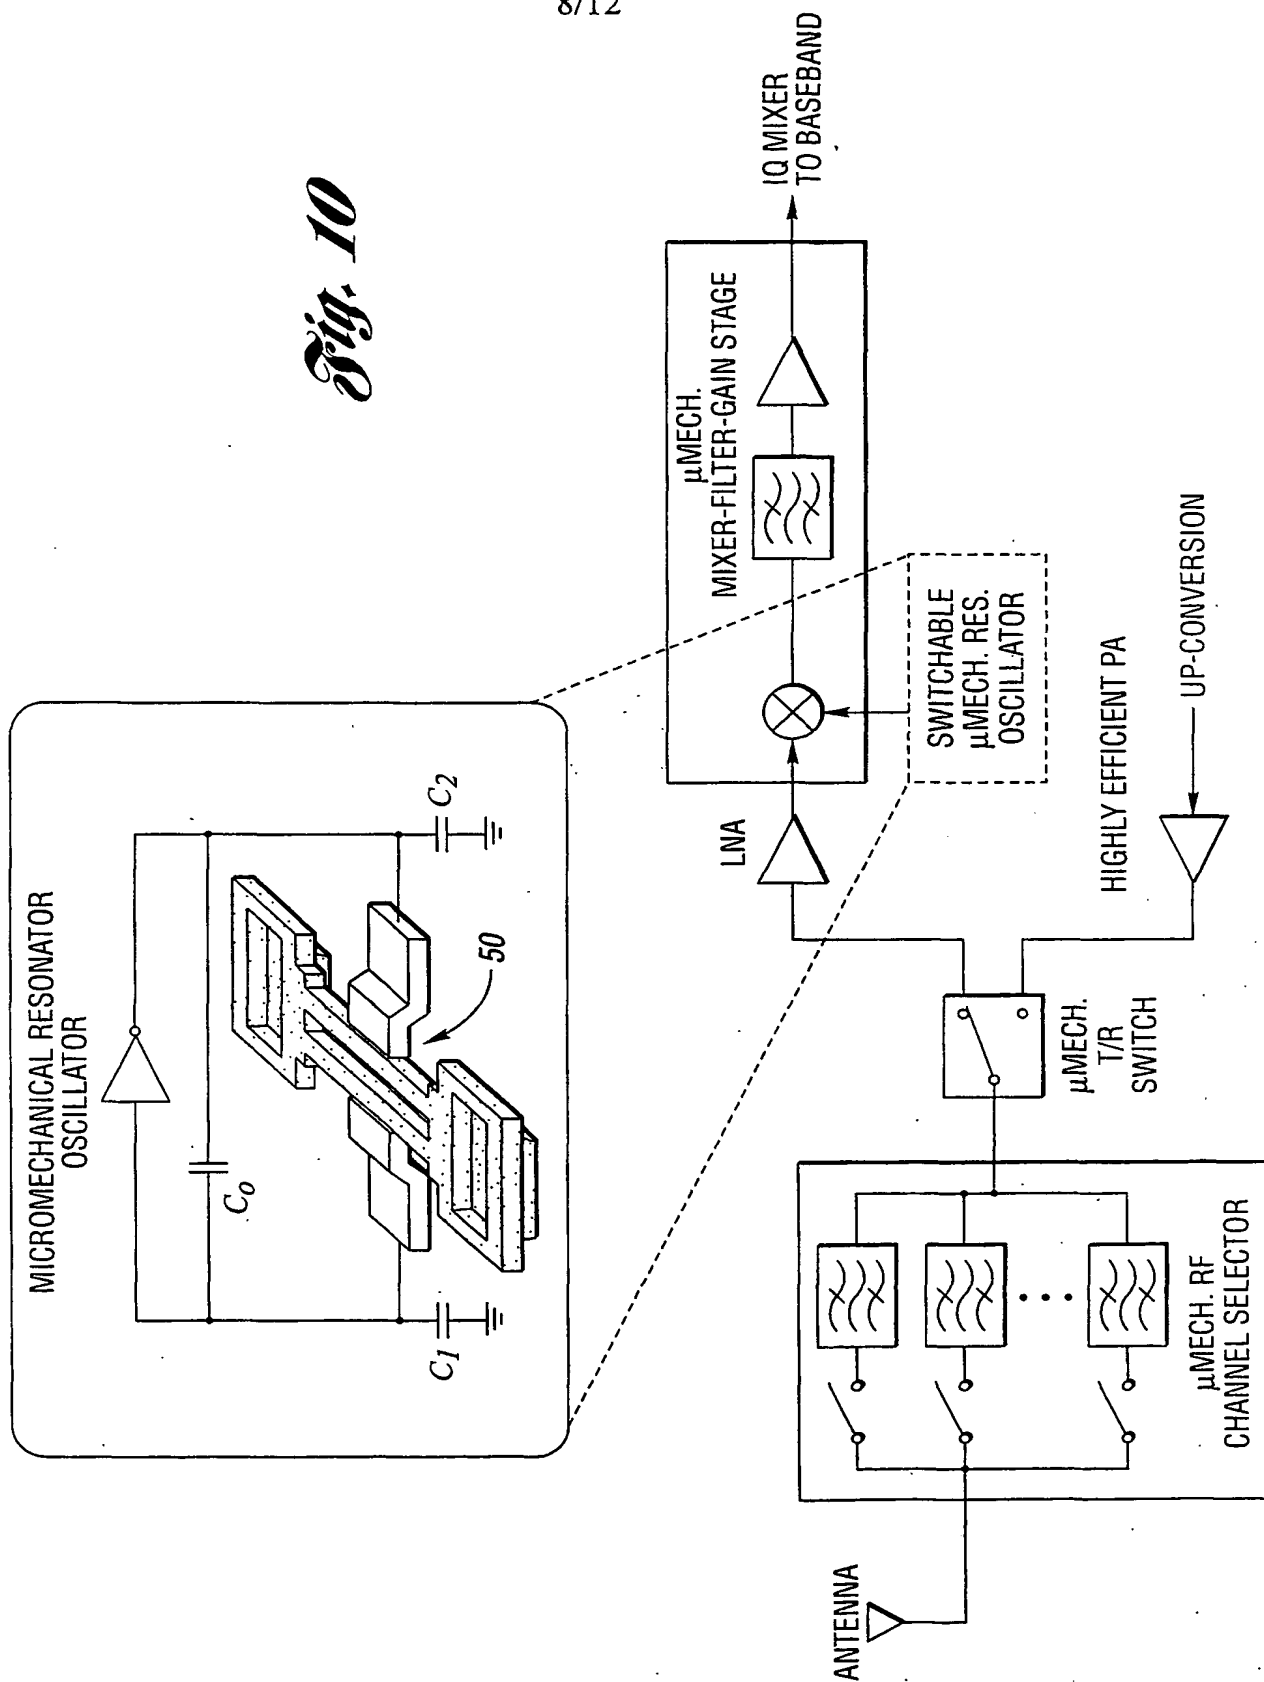

9/12

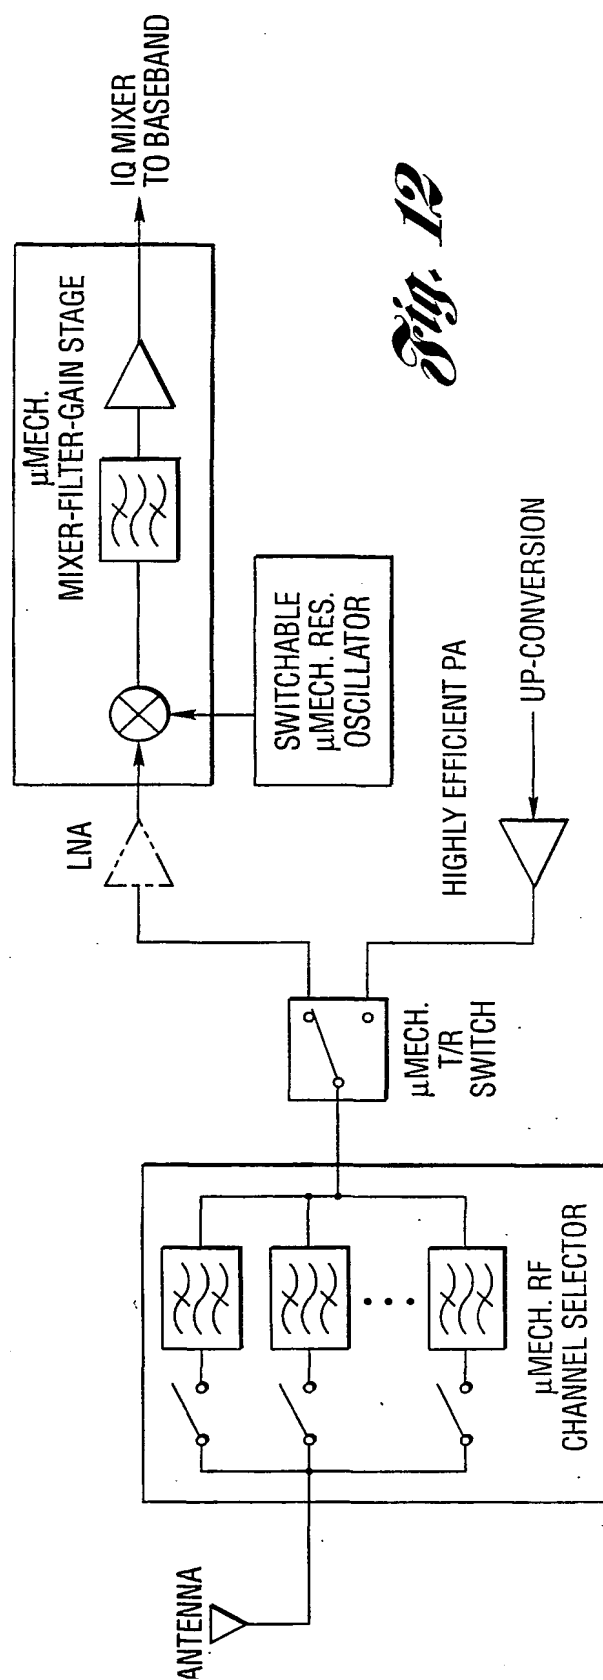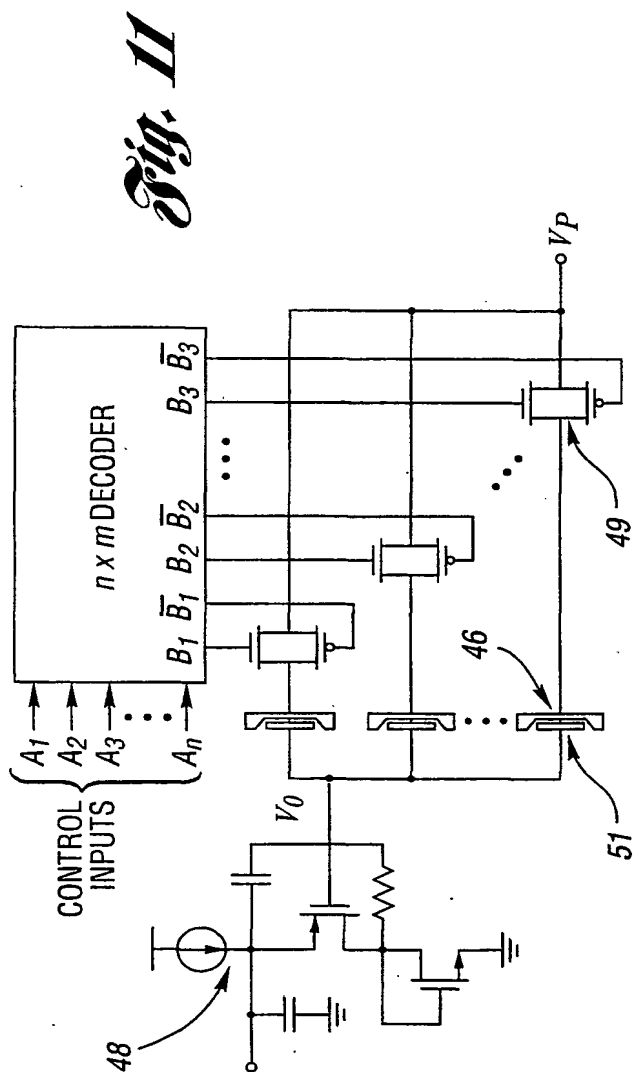

10/12

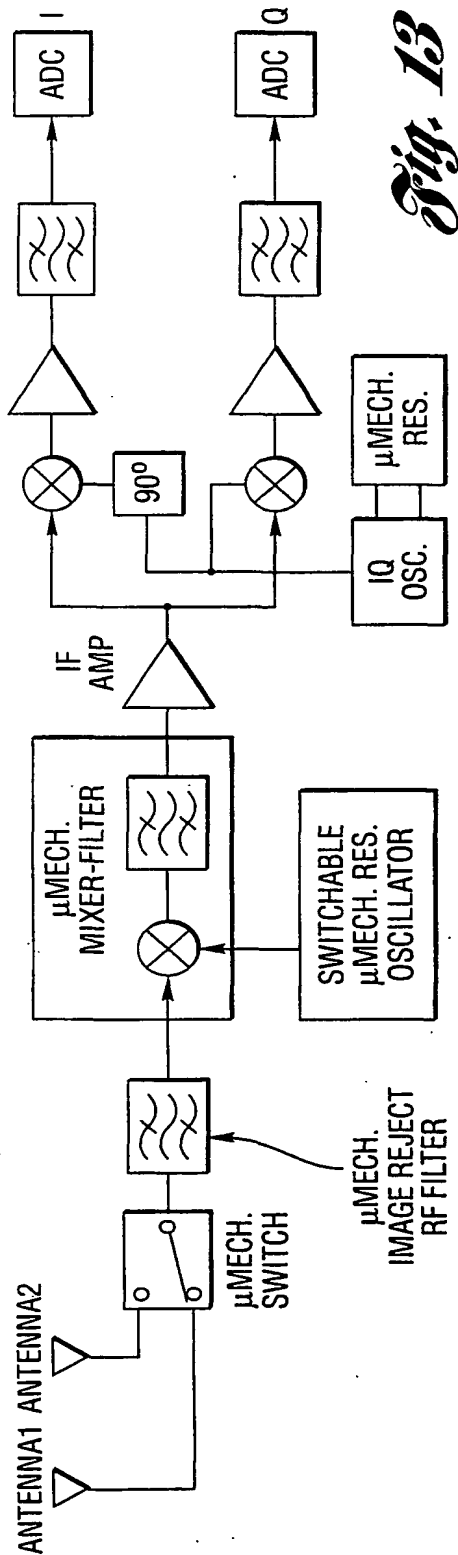


Fig. 13

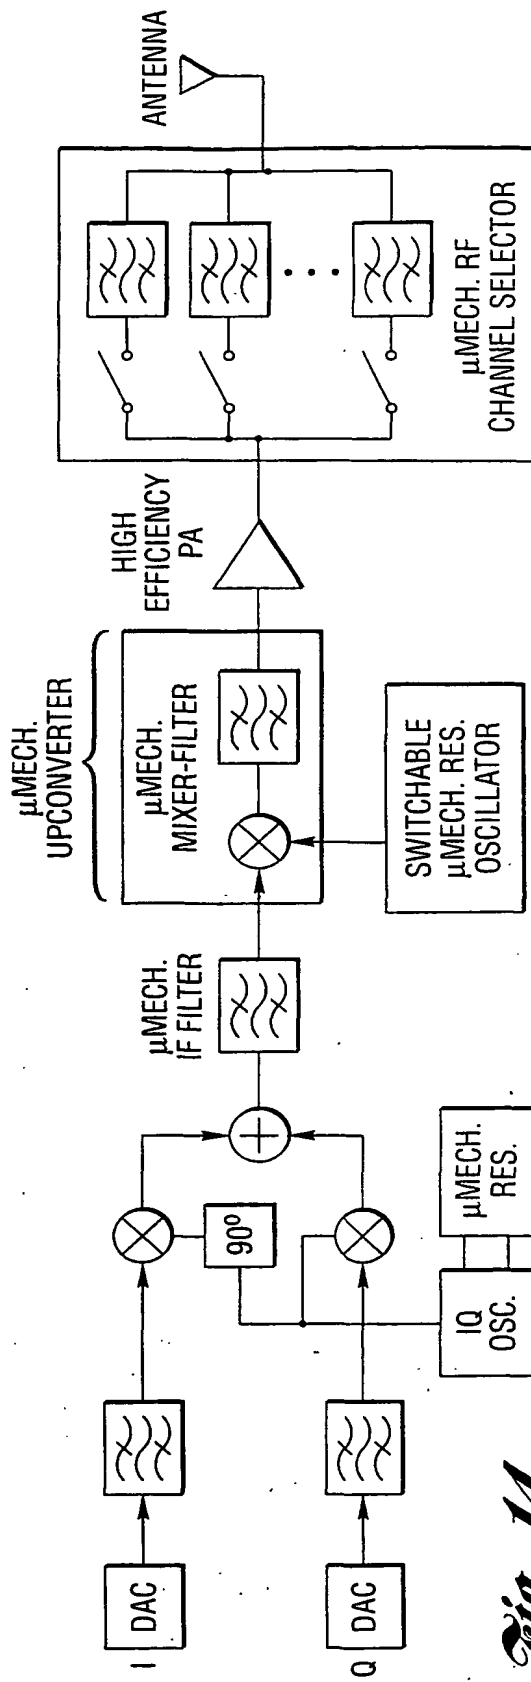


Fig. 14

11/12

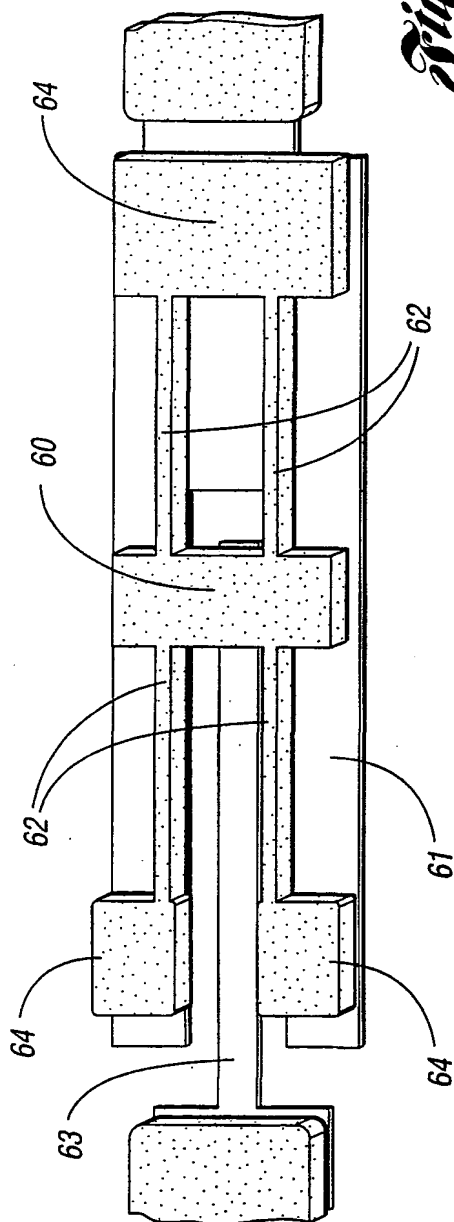


Fig. 15

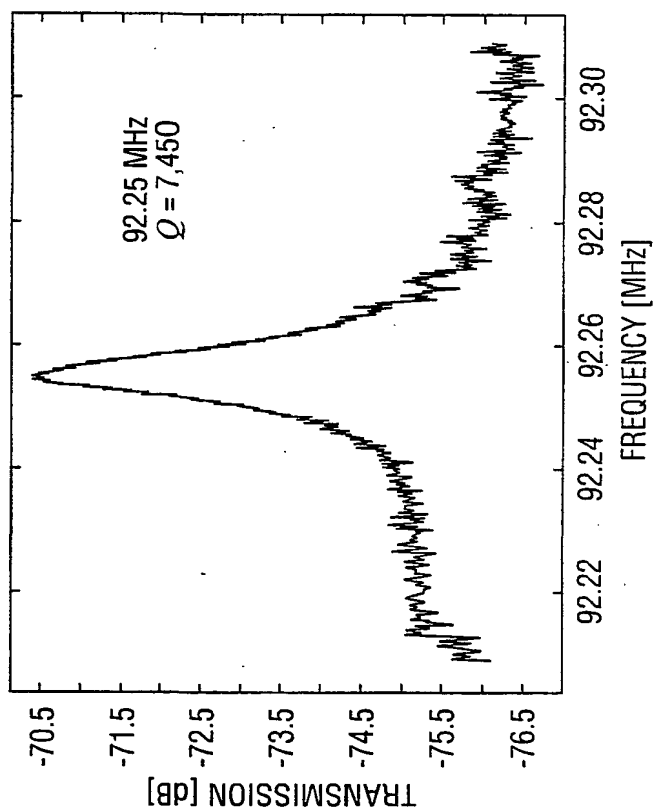


Fig. 16

12/12

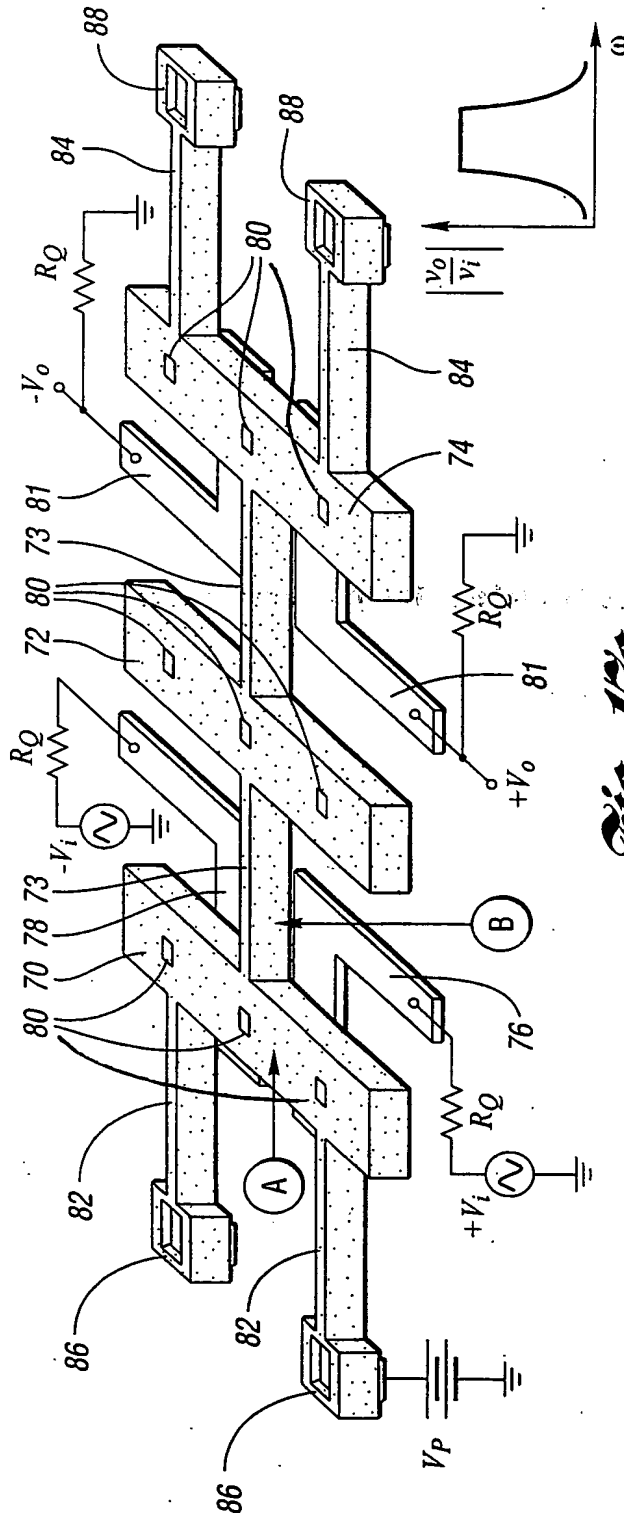


Fig. 12a

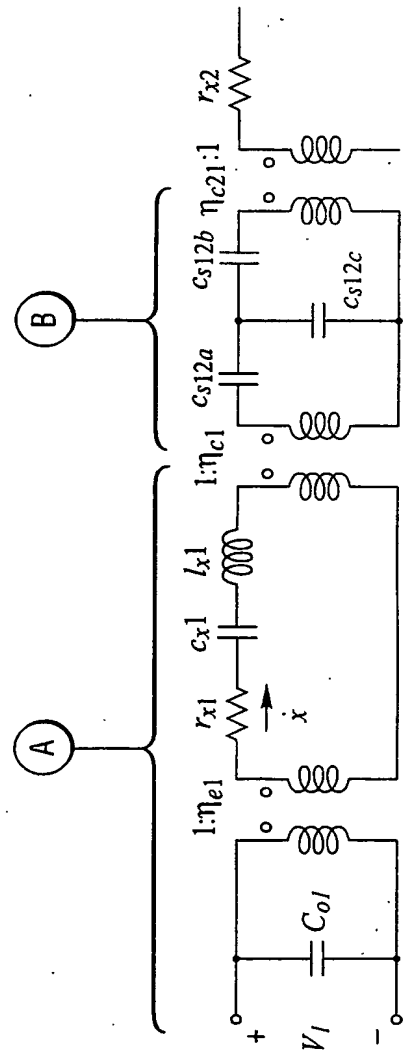


Fig. 12b

THIS PAGE BLANK (USPTO)

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 November 2001 (01.11.2001)

PCT

(10) International Publication Number
WO 01/82467 A3

(51) International Patent Classification⁷: **H03H 9/46**

(21) International Application Number: PCT/US01/40563

(22) International Filing Date: 20 April 2001 (20.04.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/199,063 20 April 2000 (20.04.2000) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 60/199,063 (CIP)
Filed on 20 April 2000 (20.04.2000)

(71) Applicant (for all designated States except US): **THE REGENTS OF THE UNIVERSITY OF MICHIGAN**
[US/US]: 3003 S. State Street, Ann Arbor, MI 48109 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NGUYEN, Clark, T., C.** [US/US]; Apartment No. 302, 3000 Whisperwood Drive, Ann Arbor, MI 48105 (US).

(74) Agents: **SYROWIK, David, R.** et al.: Brooks & Kushman, 1000 Town Center, 22nd floor, Southfield, MI 48075 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:
11 April 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR GENERATING A SIGNAL HAVING AT LEAST ONE DESIRED OUTPUT FREQUENCY UTILIZING A BANK OF VIBRATING MICROMECHANICAL DEVICES

(57) Abstract: Several MEMS-based methods and architectures which utilize vibrating micromechanical resonators in circuits to implement filtering, mixing, frequency reference and amplifying functions are provided. A method and apparatus are shown for generating a signal having at least one desired output frequency such as LO frequency in an RF subsystem in response to a tuning voltage and without the need for a phase-locking circuit. One of the primary benefits of the use of such architectures is a savings in power consumption by trading power for high selectivity (i.e., high Q). Consequently, the present invention relies on the use of a large number of micromechanical links in SSI networks to implement signal processing functions with basically zero DC power consumption.

WO 01/82467 A3

INTERNATIONAL SEARCH REPORT

In national Application No.
PCT/US 01/40563A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H03H9/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H03H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| Y | US 5 839 062 A (NGUYEN CLARK TU-CUONG ET AL) 17 November 1998 (1998-11-17) cited in the application | 1 |
| A | column 1, line 11 -column 2, line 63 | 2,3,7 |
| A | column 7, line 1 -column 7, line 15 column 8, line 55 -column 9, line 5 | 11 |
| Y | EP 0 962 999 A (NOKIA MOBILE PHONES LTD) 8 December 1999 (1999-12-08) | 1 |
| A | page 3, line 54 -page 4, line 4 page 6, line 56 -page 7, column 27; figures 14,15 | 8,11,12, 16 |

☐ Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

1 November 2001

Date of mailing of the international search report

28/02/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Coppieters, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/40563

| Patent document cited in search report | | Publication date | | Patent family member(s) | | Publication date |
|---|---|---------------------|----|----------------------------|--|---------------------|
| US 5839062 | A | 17-11-1998 | AU | 2103395 A | | 09-10-1995 |
| | | | WO | 9526080 A1 | | 28-09-1995 |
| EP 0962999 | A | 08-12-1999 | FI | 981245 A | | 03-12-1999 |
| | | | CN | 1237827 A | | 08-12-1999 |
| | | | CN | 1237828 A | | 08-12-1999 |
| | | | EP | 0962999 A2 | | 08-12-1999 |
| | | | EP | 0963000 A2 | | 08-12-1999 |
| | | | FI | 981415 A | | 03-12-1999 |
| | | | JP | 2000030594 A | | 28-01-2000 |
| | | | JP | 2000030595 A | | 28-01-2000 |
| | | | US | 6204737 B1 | | 20-03-2001 |
| | | | US | 6242843 B1 | | 05-06-2001 |

THIS PAGE BLANK (USPTO)